




SWEEPER

operating Manual

(ZLS800)

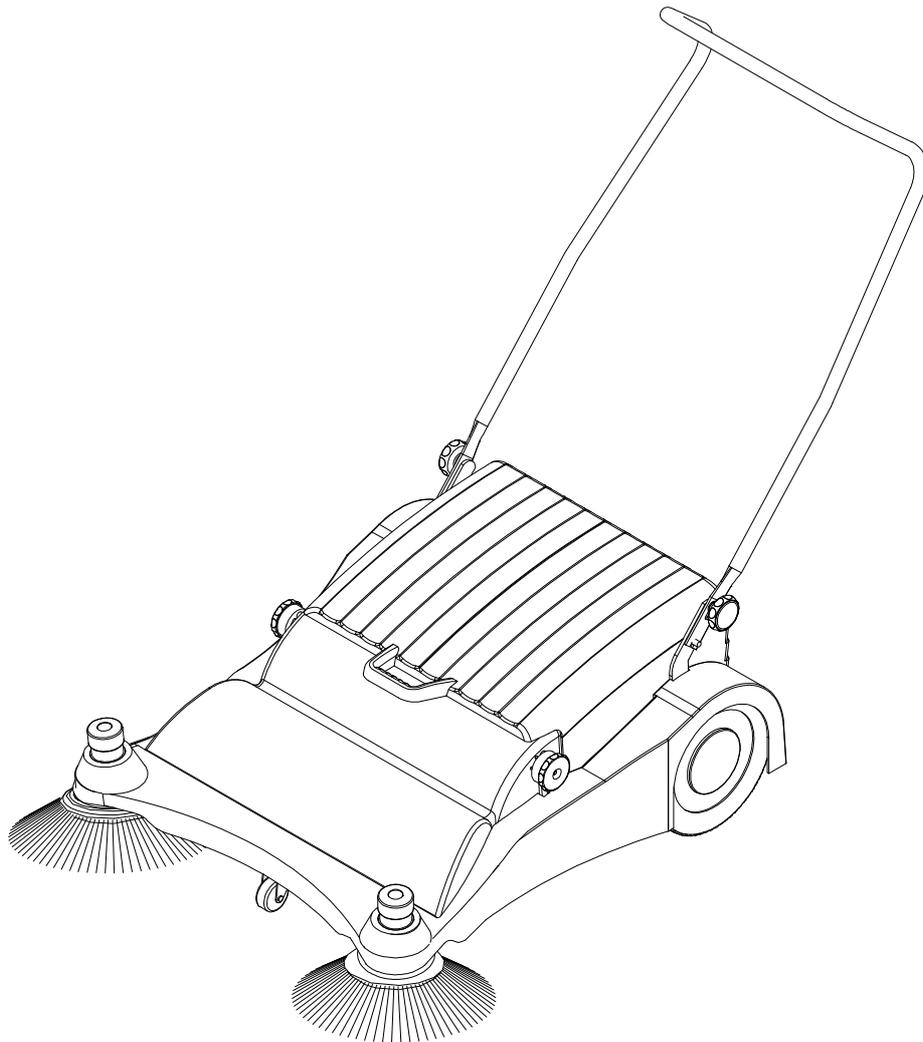

This machine has been designed for use in the following applications:

Sweeping work in courtyards, on path's and laneway, and on warehouse/showroom floors. Any other uses are considered to be incorrect.

The manufacturer (and its distributors) will not be held responsible for any consequence caused by other uses. The factory will not be held responsible for the third person's body injury and the loss of property caused by the user's incorrect uses.

Unpacking and assembly:

1. Check all the components while unpacking and assembling the machine according to the drawing in this instruction manual.
2. Insert Fore-brush on the Fore-brush axes. Fore-brush should be connected with the corresponding position (shown as figure 1).
3. Install Handrail. Please follow the assembly process (shown as Figure 2 step ① , ② , ③) to install the Handrail in the right position.

Guide to sweeping:

1. Sweep with the wind as much as possible.
2. Remember to adjust the side brushes to the correct height.
3. Remember the columns are adjustable as well.

Work on an angle:

1. Be careful to travel slowly, especially when you are changing directions.
2. Always try to work up and down the slope, not across.
3. Don't work on an incline of more than 20°.

Before use:

Check and inspect all the parts are in good state.

After use - Clean the dirt on the sweeper and maintain it.

Storage - Clean the sweeper. Apply anti-rust treatments to metal parts. Place the sweeper in a dry and clean sealing chamber. Keep out of direct sunlight

Quality guarantee:


The period of the quality guarantee is worked out by the importer of our company. Within the period of quality guarantee, we will repair your product for free if any quality fault is caused as a result of its material or its production. Please contact the dealer or the local agent if your product needs to be repaired.

Guide to breakdown removal:

You can solve the problem referring to the following guide to breakdown removal when your sweeper breaks down. If you have any question, please contact your dealer.

Problem	Possible cause	Maintenance
No rotation of the side brushes	1. Belt draw-out 2. Belt abruption	Replace the belt.
No rotation of the cylinder brush	1. Belt draw-out 2. Belt abruption	Replace the belt.
Fierce vibration	Screws and fittings are loose.	Tighten the screws.
Inflexible adjustment of the cylinder brush	Too much dirt is blocked in the slipway.	Clean the dirt.

附图一

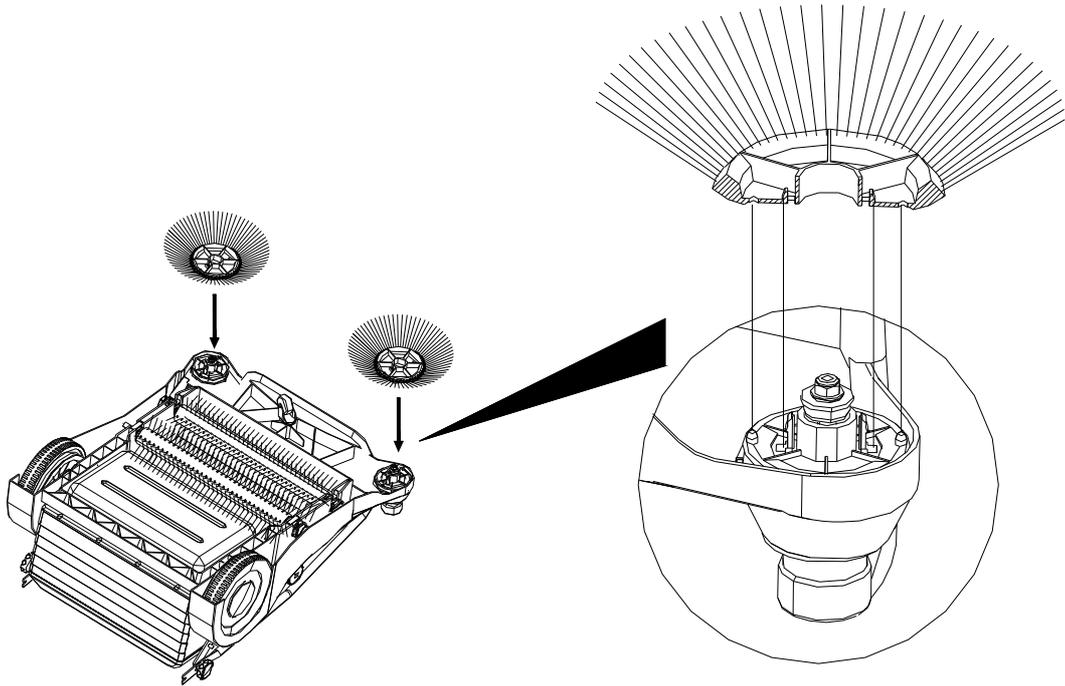

附图二

