


KANGA S Range Rotary Cutters are general-purpose implements designed and engineered to thrive in harsh Australian conditions.

Our S Range Rotary Cutters boast a rugged 3mm deck, fully reinforced underneath, ensuring exceptional strength and longevity. This robust construction enhances durability and creates a clean-top design that minimises debris and water collection; keeping your implement in prime condition even in the harshest environments.

The lowered high-tensile cutter bar allows a higher volume of material to discharge efficiently, producing fast, clean and dependable cutting in light scrub, regrowth and long grass.

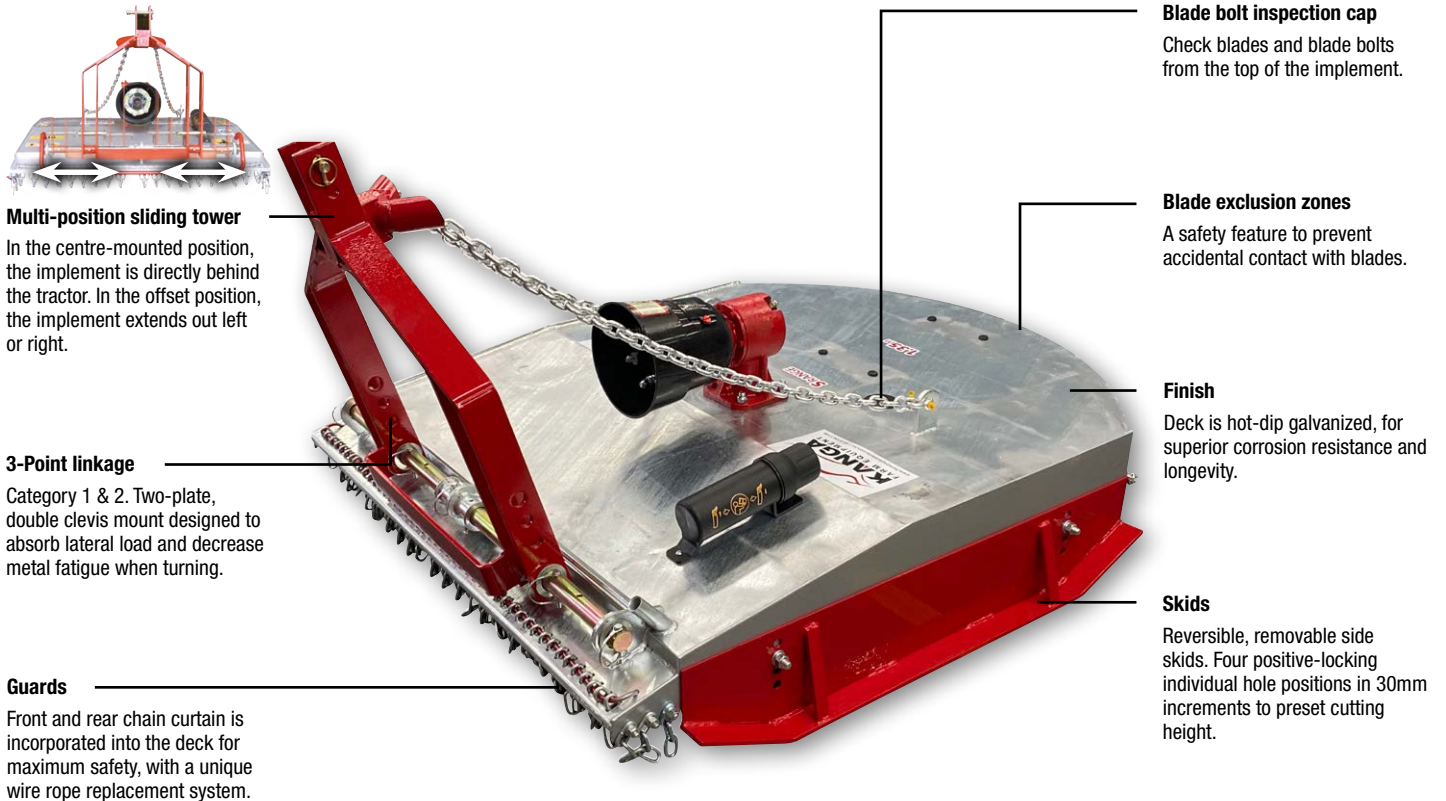

**Countersunk blade bolts**

This design avoids wear and tear. Unfasten the lock nut to replace blades throughout the lifetime of the implement.

**Options**



**KSRDW**

Light-duty depth wheel

Code	KSSR120	KSSR135	KSSR150
Size reference	1.2m   4'0"   48"	1.35m   4'6"   54"	1.5m   5'0"   60"
Construction	3mm, round-back, clean-top deck with reinforced subframe		
Gearbox	40hp, 540rpm, 1:1.93 ratio		
PTO shaft/clutch	Series 4 with 150mm (6") friction clutch		
Cutter bar	Lowered, bolt-together, sandwich design		
Blades	Two (2) stepped, suction, spring steel pivoting on hardened bushes		
Overall width (mm)	1410	1560	1710
Cutting width (mm)	1200	1350	1500
Cutting height (mm)	50 - 140		
Tractor range (hp)	28 - 40   23 - 33 @ PTO	35 - 50   25 - 42 @ PTO	40 - 50   33 - 42 @ PTO
Blade tip speed (ft/min)	13,119	14,760	16,400
Weight (kg)	250	280	300