


KANGA S Range Rotary Cutters suit tractors rated between 28 and 50 horsepower, making them a practical choice for general land management across small to mid-sized properties. Designed for clearing light scrub, managing regrowth and cutting long grass, they perform well in paddocks, roadside verges and other areas where vegetation control is required.

A multi-position sliding tower allows the cutter to be mounted directly behind the tractor or offset to either side, making it easier to work along fence lines, boundaries or under low-hanging branches. The lowered high-tensile cutter bar helps discharge cut material efficiently, supporting steady operation across varied terrain.

Manufactured in Australia, the KANGA S Range Rotary Cutter features a 3mm steel deck with full underside reinforcement. Its clean-top deck prevents debris build-up and water pooling, and when paired with the hot-dip galvanised finish, it enhances surface protection and contributes to the implement's longevity.

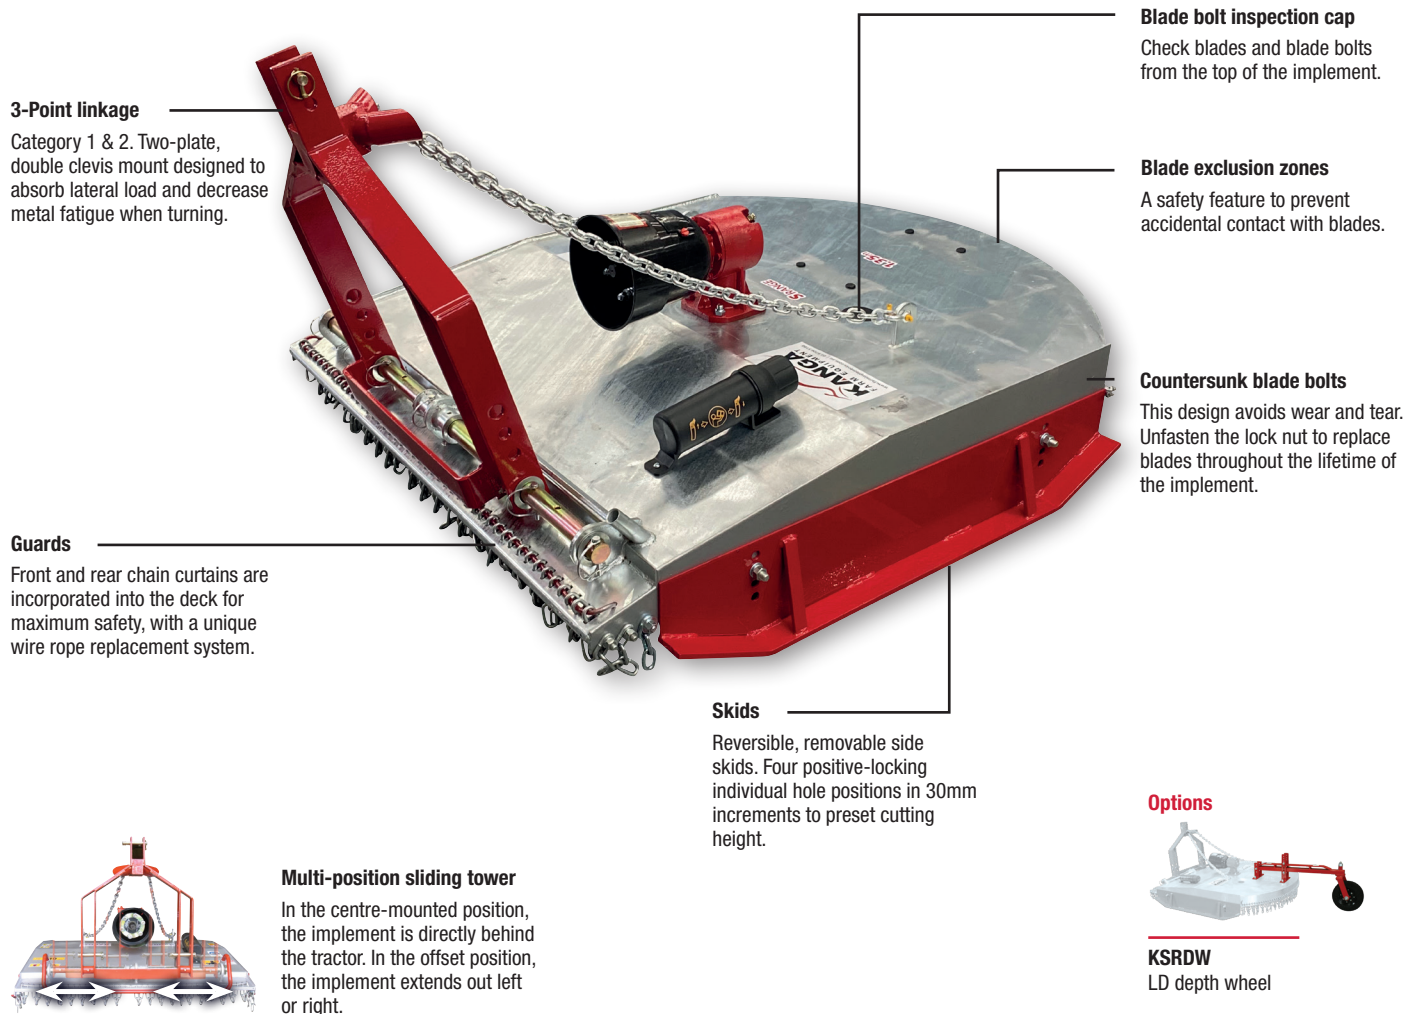

Code	KSSR120	KSSR135	KSSR150
Size reference	1.2m 4'0" 48"	1.35m 4'6" 54"	1.5m 5'0" 60"
Tractor range (hp)	28 - 50 23 - 42 @ PTO	35 - 50 25 - 42 @ PTO	40 - 50 33 - 42 @ PTO
Construction	3mm, round-back, clean-top deck with reinforced subframe		
Gearbox	40hp, 540rpm, 1:1.93 ratio		
PTO shaft/clutch	Series 4 with 150mm (6") friction clutch		
Cutter bar	Lowered, bolt-together, sandwich design		
Blades	Two (2) stepped, suction, spring steel pivoting on hardened bushes		
Blade tip speed	13119ft/min 66.6m/s	14760ft/min 75.0m/s	16400ft/min 83.3m/s
Overall width (mm)	1410	1560	1710
Cutting width (mm)	1200	1350	1500
Cutting height (mm)	50 - 140		
Weight (kg)	250	280	300
Price			