


Bale Spike

The KANGA Bale Spike has been designed for farmers, with small to medium horsepower tractors, who are looking for an affordable option to move round hay bales, one at a time.

The implement is designed with a small high tensile spike to stop the bale spinning and a longer, heat-treated Conus II type tine that carries the weight of the bale. The tine is removable and replaceable if the operator wants to purchase different lengths.

The category 1, 3-point linkage is a double clevis slip in pin design making the frame less likely to bend or twist with the weight of the bale.

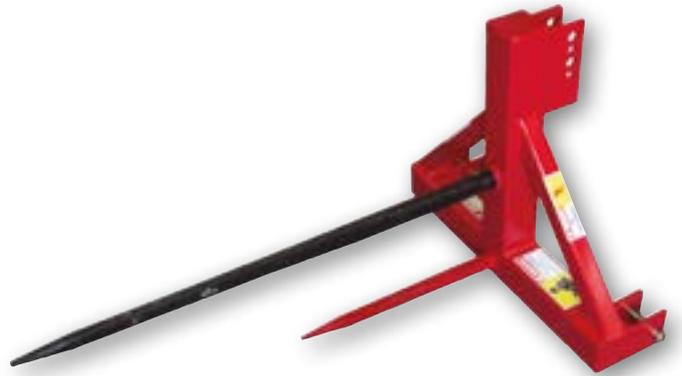

Code	KHH-BS
Description	Bale Spike
Construction	Steel 5mm sq. tube, welded and gusseted
Linkage	Double clevis, category 1
Finish	Powder coated
Type of tines	Small: 280mm, high tensile (fixed) Large: 1240mm, straight Conus II, removable
No. of tines	2
Weight (kg)	60
Price	


Silage Fork

The KANGA Silage Fork has been designed to enable farmers to move a single bale of silage.

The implement is a rigid, fully welded and reinforced design with two (2) Conus II bushings welded into the frame.

The tines are made from 60Si7 Alloy Spring Steel (1650 N/mm²) that is forged and heat-treated providing the tines with a maximum load rating of 570N (1578kg/3000lbs).

The category 1 and 2 linkage is a double clevis slip in pin design that makes the frame less likely to bend or twist with the weight of the bale.

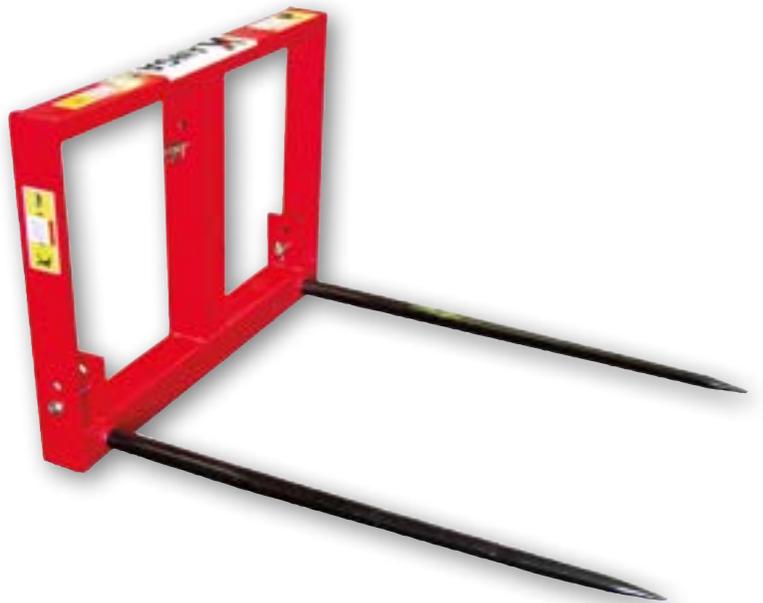

Code	KHH-SF
Description	Silage Fork
Construction	Steel 5mm sq. tube and 12mm plate, welded and gusseted
Linkage	Double clevis, category 1 and 2
Finish	Powder coated
Type of tines	1240mm, straight Conus II, removable with cone nut
No. of tines	2
Weight (kg)	87
Price	