


Pasture Topper



KANGA 3-Point Linkage Pasture Toppers are designed, engineered and manufactured in Australia. This topper has a category 2 and 3 compatible rigid tower that suits tractors 60 to 200hp.

In situations where there is extensive grazing, stock deteriorates the condition of pasture. Continuing to feed stock on rundown pasture results in a drop in condition and production. The best way to maintain quality, reduce the spread of weeds and increase yields is by regularly topping pasture.

The open back design of the Pasture Topper is fitted with a hydraulically controlled rear door. When the door is open the lowered Bisalloy oval disc rotors, powered by high-speed gearboxes, evenly discharge the cut material over a wide area.

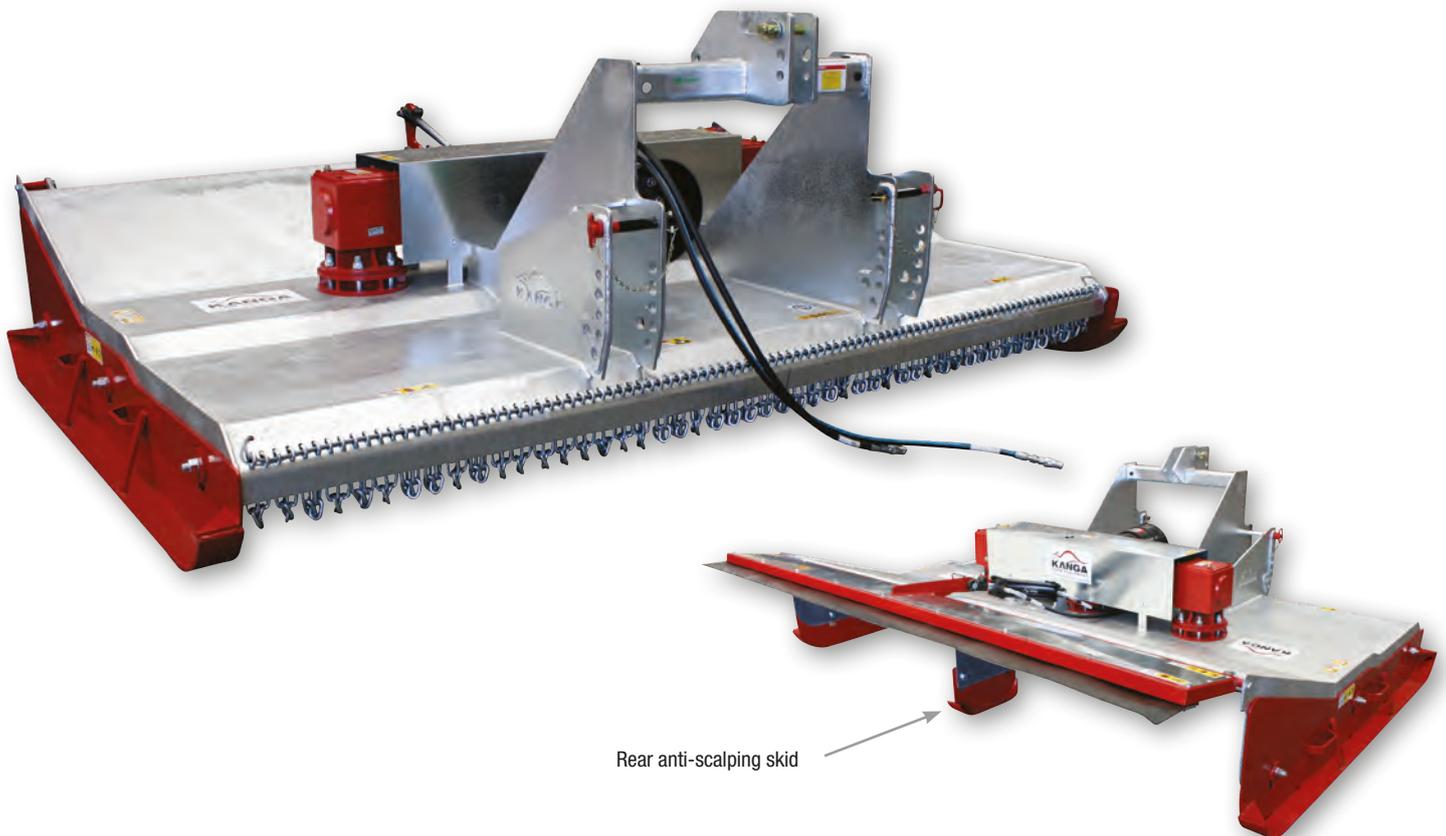

Code	KT090 - 2.4	KT130 - 3.0	KT200 - 3.0
Size reference	2.4m 8'0" (90hp)	3.0m 10'0" (130hp)	3.0m 10'0" (200hp)
Construction	6mm, square, folded, clean top deck with structural channel chassis and 10mm side plates		
Gearbox	90hp, 540rpm	130hp, 540rpm	200hp, 1000rpm
PTO shaft	Series 8, 6 spline	W2600	
Clutch	200mm (8") friction (slip) over-run clutch		
Skids	Adjustable, positive locking, four (4) positions (30mm increments)		
Rotor setup	Lowered, overlapping and timed, Bisalloy steel oval disc rotors		
Blades	360° Spinning suction design, clockwise and anti-clockwise on hardened bushes		
Linkage/Mounting	Double clevis, category 2 and 3		
Tower position(s)	Centre mounted		
Finish	Hot dipped galvanized deck and painted parts		
Stone guards	Front chains (10mm) incorporated into the deck with hydraulic opening rear rubber guard		
Overall width (mm)	2540	3190	3190
Cutting width (mm)	2340	2890	2890
Cutting height (mm)	50 - 140		
Tractor range (hp)	60 - 90	80 - 130	80 - 200
Blade tip speed (ft/min)	19,620	16,560	15,710
Weight (kg)	690	1,350	1,350