

Trailing Pasture Topper




KANGA Trailing Pasture Toppers are designed, engineered and manufactured in Australia for fast, clean, dependable topping of pasture.

Providing professional farmers with a trailing option, this topper comes standard with hydraulic height control (front and rear), large solid cushion wheels, a wide-angle power take-off shaft and is suitable for tractors 80 to 200hp.

The body of the Trailing Pasture Topper is formed and folded, then fully reinforced with structural channel. The open back deck is fitted with a manually controlled rear flap. When the flap is open the lowered Bisalloy disc rotors, powered by high-speed gearboxes, evenly discharge the cut material.

This implement is ideal for maintaining quality, reducing the spread of weeds and increasing yields on dairy, beef and sheep operations.

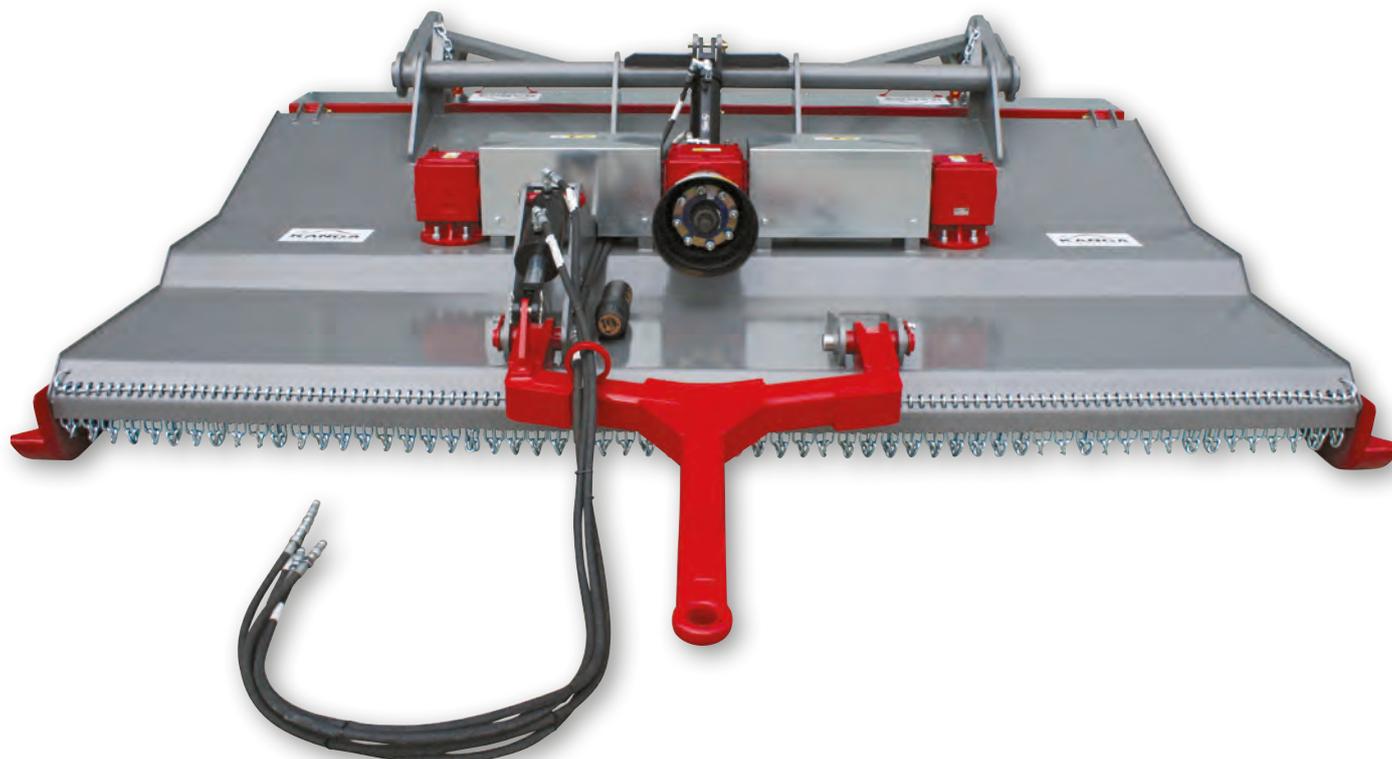

Code	KTT130 - 3.0	KTT200 - 3.0	KTT200 - 3.6
Size reference	3.0m 10'0" (130hp)	3.0m 10'0" (200hp)	3.6m 12'0" (200hp)
Construction	6mm, square, folded, clean top deck with structural channel chassis and 10mm side plates		
Gearbox	130hp, 540rpm	200hp, 1000rpm	
PTO shaft	Heavy-duty, star profile, wide angle, W2580 Series		
Clutch	200mm (8") friction (slip) over-run clutch		
Skids	Adjustable, positive locking, four (4) positions (30mm increments)		
Rotor setup	Lowered, overlapping and timed, Bisalloy steel oval disc rotors		
Blades	360° Spinning suction design, clockwise and anti-clockwise on hardened bushes		
Linkage/Mounting	Tow hitch/drawbar with hydraulic height control		
Mounting position(s)	Centre mounted		
Finish	High build primer and agricultural enamel top coat		
Stone guards	Front chains (8mm) incorporated into the deck with manual opening rear rubber guard		
Wheels	Hydraulic height adjustable, solid cushion tyre with automotive axles		
Overall width (mm)	3190	3190	3800
Cutting width (mm)	2890	2890	3500
Cutting height (mm)	50 - 300 (max. 140 on the skids)		
Tractor range (hp)	80 - 130	80 - 200	100 - 200
Blade tip speed (ft/min)	16,560	15,710	18,850
Weight (kg)	1,500	1,500	1,650