

BPF Series Mulcher



The BULLY BPF Series Mulcher, designed in Europe, is a versatile, heavy-duty implement built for category 2 tractors ranging from 50 to 100hp. The rotor speed of 2,146rpm is powered by a 100hp transmission, working in tandem with hammer blades to deliver a high-quality cut in vineyards, orchards and pastures.


With the capacity to handle dry prunings and sticks up to 70mm in diameter, as well as living green undergrowth up to 40mm in diameter, the rear deck of the BPF Mulcher is equipped with removable mulching rakes. These rakes securely hold large prunings in the cutting chamber, ensuring efficient mulching. Additionally, the rear flap can be opened to top pastures or clear the chamber, making it ideal for handling high volumes of material without compromising speed.

With its double-skinned deck, side shift capability, height-adjustable rear roller and precision-engineered chamber, the BULLY BPF Series Mulcher is a reliable and outstanding implement that guarantees exceptional performance.

Belt drive transmission:
smooth, low maintenance,
cost-effective.



Hammers and internal debris catching lugs

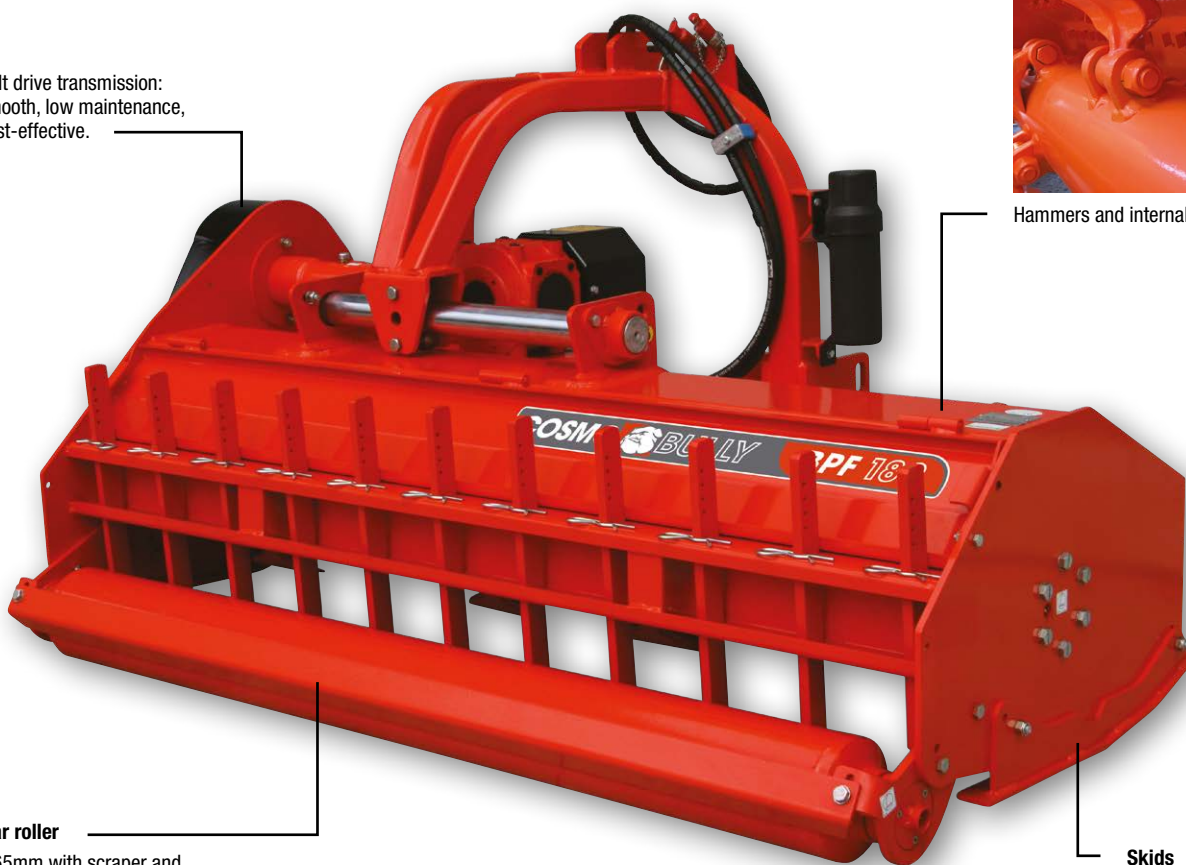

Rear roller

Ø165mm with scraper and internal bearings with trash-guard. Three positive-locking positions for easy presetting of cutting height.

Skids

Two positive-locking positions with individual bolt holes.



Rakes OUT & rear flap open

With rakes removed, and rear flap open, the material is single-cut and quickly discharged.



Rakes OUT

With rakes removed, the material is coarsely mulched and discharged in front of roller.




Rakes IN & rear flap closed

Height-adjustable mulching rakes retain material in the cutting chamber for finer mulching by the hammers.

Hydraulic side shift

Hydraulic rams and hoses allow for in-out shifting and pausing at any point, providing added convenience and maneuverability. Ideal for mulching along fence lines and under tree branches and vines.

TBPF160H	TBPF180H	TBPF200H	TBPF225H	TBPF250H
Hyd. side shift (400mm)	Hyd. side shift (337mm)	Hyd. side shift (437mm)	Hyd. side shift (467mm)	

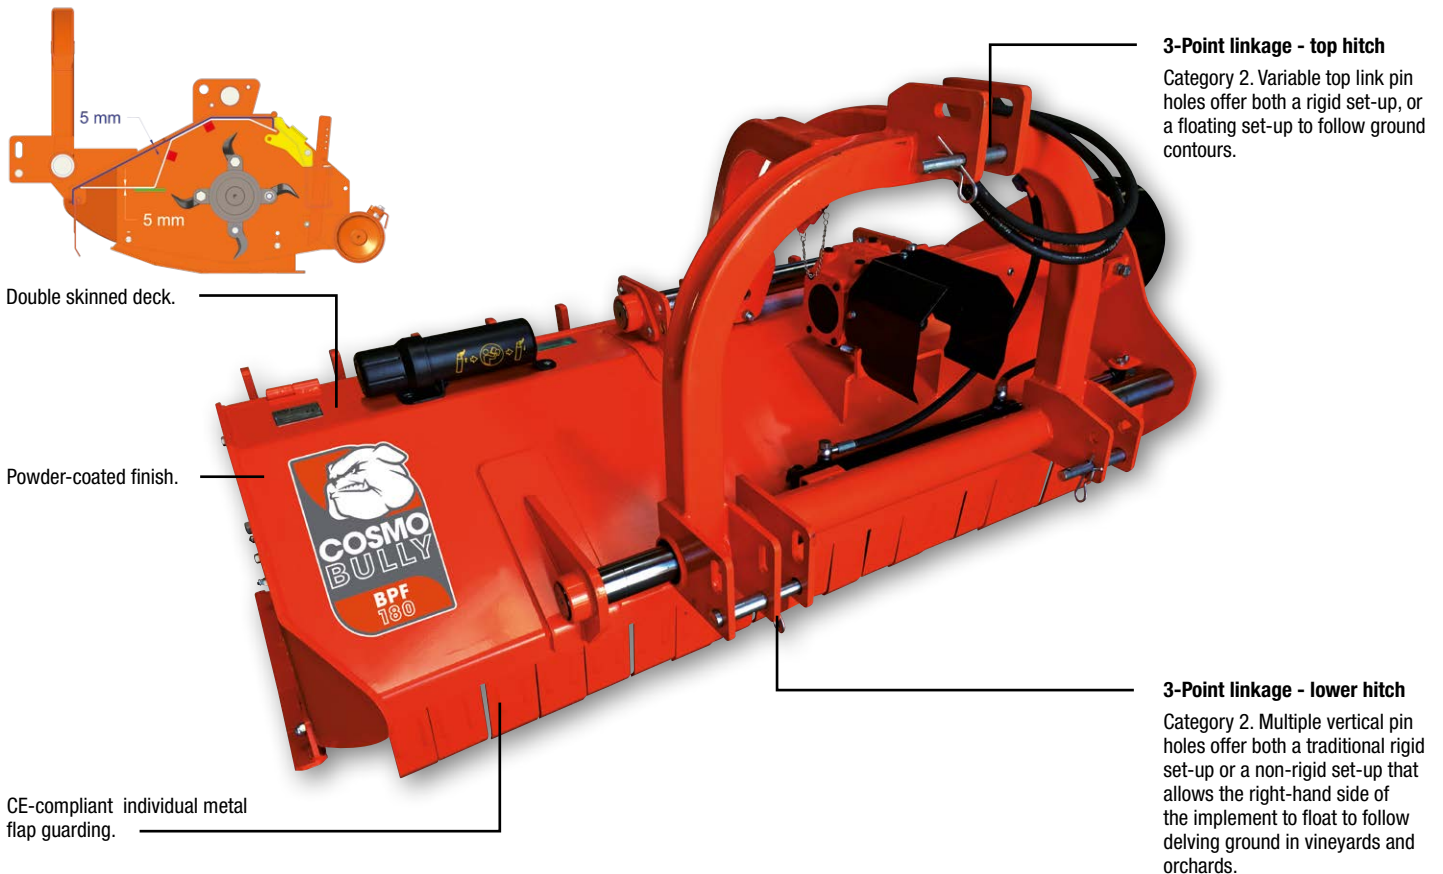

Code	TBPF160H	TBPF180H	TBPF200H	TBPF225H	TBPF250H
Size reference	1.6m 5'4" 64"	1.8m 6'0" 72"	2.0m 6'8" 80"	2.25m 7'6" 90"	2.5m 8'2" 98"
Belts	Four (4) XPB type				
Gearbox	100hp, 540rpm with freewheel				
PTO shaft	Series 6				
Rotor swing dia. (mm)	410				
Rotor diameter (mm)	170				
Rotor speed (rpm)	2146				
Type of flail	Hammer				
No. of flails	16		20	20	24
Overall width (mm)	1800	2000	2200	2450	2700
Working width (mm)	1580	1780	1980	2230	2480
Cutting height (mm)	20 - 75				
Tractor range (hp)	50 - 100 42 - 84 @ PTO	60 - 100 50 - 84 @ PTO	70 - 100 58 - 84 @ PTO	80 - 100 67 - 84 @ PTO	85 - 100 71 - 84 @ PTO
Weight (kg)	640	680	735	800	865