


SFM-M Series Mulcher




The BULLY SFM-M Series Mulcher, designed in Europe, is a versatile medium/heavy-duty implement built for tractors ranging from 30 to 70hp. Its multi-position bolted tower allows for offsetting, providing flexibility in various applications. Equipped with a powerful 70hp transmission, the mulcher achieves a rotor speed of 2,453rpm, driving the hammers to deliver a superior cut in vineyards, orchards and pastures.

The SFM-M Mulcher is designed to handle dry prunings and sticks up to 50mm in diameter and living green undergrowth up to 25mm in diameter. Its rear deck features removable mulching rakes, securely holding large prunings in the cutting chamber. Rakes can be removed to reduce horsepower requirements, increase operating speed and discharge a rougher mulch. For grassy applications requiring a finer finish, alternative 'Y' blades can be installed.

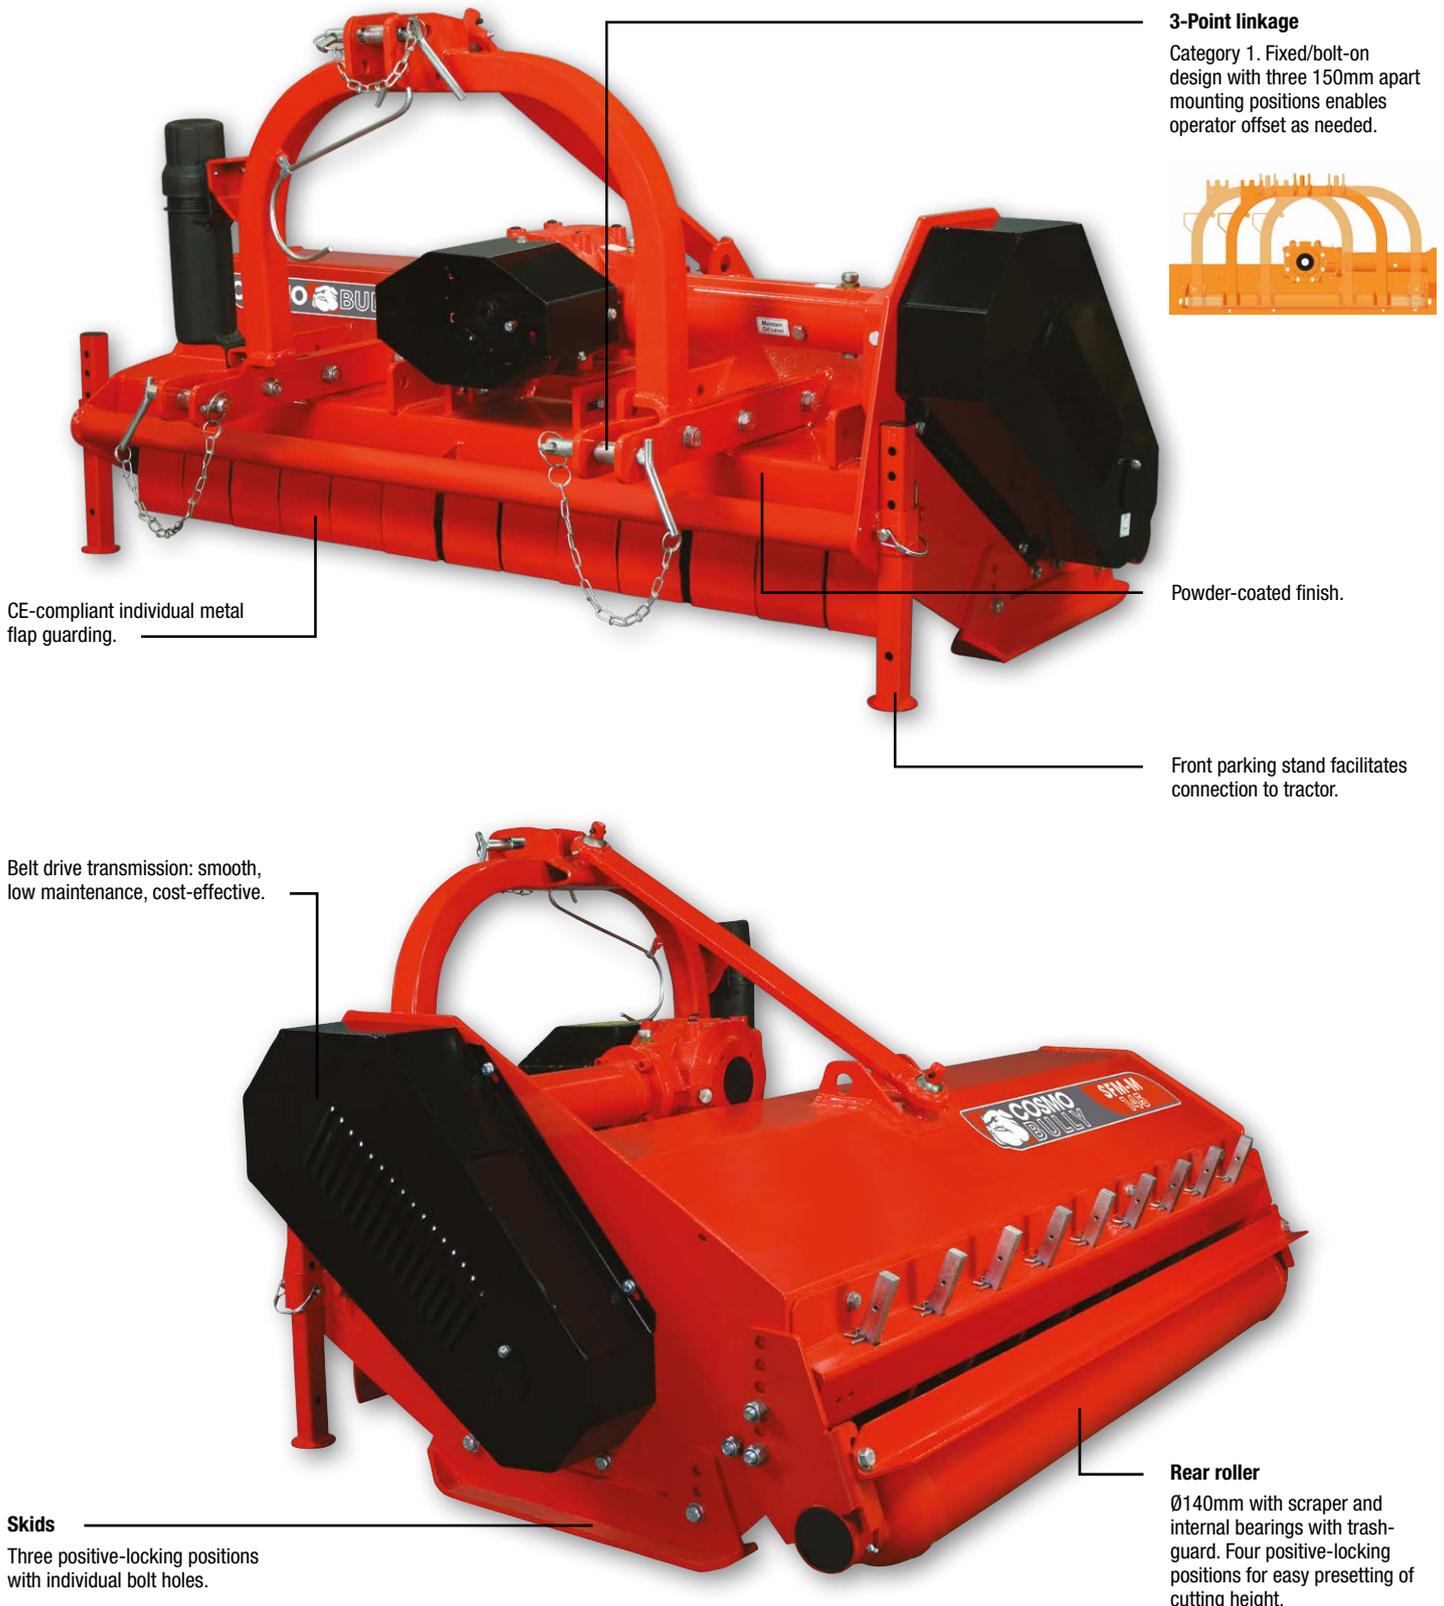

3-Point linkage

Category 1. Fixed/bolt-on design with three 150mm apart mounting positions enables operator offset as needed.



CE-compliant individual metal flap guarding.

Powder-coated finish.

Front parking stand facilitates connection to tractor.

Belt drive transmission: smooth, low maintenance, cost-effective.

Skids

Three positive-locking positions with individual bolt holes.

Rear roller

Ø140mm with scraper and internal bearings with trash-guard. Four positive-locking positions for easy presetting of cutting height.




Rakes OUT

With rakes removed, the material is discharged at a faster rate and is more coarse.



Rakes IN

Height-adjustable mulching rakes retain material in the cutting chamber for finer mulching by the hammers.

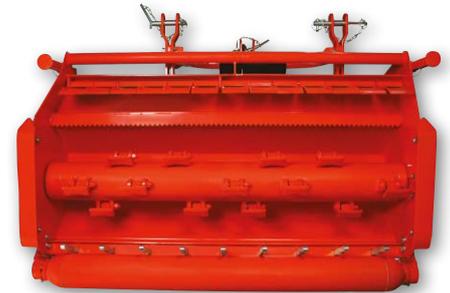

Large cutting chamber

A Ø380mm rotor swing diameter creates a spacious cutting chamber, accommodating a large volume of material. An internal serrated bar helps capture material to be finely mulched before discharge.

Code	TFSM130M	TFSM145M	TFSM160M
Size reference	1.3m 4'3" 51"	1.45m 4'9" 57"	1.6m 5'4" 64"
Belts	Four (4) XPB type		
Gearbox	70hp, 540rpm with freewheel		
PTO shaft	Series 4		
Rotor swing dia. (mm)	380		
Rotor diameter (mm)	160		
Rotor speed (rpm)	2453		
Type of flail	Hammer standard 'Y' blades on request		
No. of flails	16 32	18 36	20 40
Overall width (mm)	1480	1620	1770
Working width (mm)	1300	1450	1600
Cutting height (mm)	20 - 105		
Tractor range (hp)	30 - 70 25 - 58 @ PTO	35 - 70 29 - 58 @ PTO	40 - 70 33 - 58 @ PTO
Weight (kg)	366	388	412