

SGM Finishing Mower



The BULLY SGM Finishing Mowers are specifically designed to efficiently groom lawn and grass areas. These mowers are suitable for tractors with a power range of 25 to 60hp, making them ideal for mowing and maintaining various locations such as private lawns, parks, hospital grounds, schools and golf courses.

Equipped with three suction-type blades that rotate at a high tip speed, the SGM Finishing Mowers deliver a precise and clean cut, ensuring that even the most delicate grass is neatly groomed.

Adjusting the cutting height is a straightforward process, as you can easily add or remove spacers on the caster wheel shafts. Additionally, the mower is equipped with an anti-scalping roller to prevent uneven cuts and maintain a consistent and uniform finish.

Transmission

Two belts are configured in an overlapping triangular pattern that allows them to drive all three spindle pulleys.

3-Point linkage - top hitch

The top hitch point enables forward and backward movement, allowing the mower to float over the undulating ground while maintaining a constant cut height.

Wheels

Four, solid 360° rotation wheels allow the mower to follow the contour of the ground resulting in a precise and level cut in undulating conditions.


3-Point linkage - lower hitch

The lower category 1 hitch points feature a double-bolt design, extending compatibility with various tractors and offering the option for rigid or floating configurations.

Design

The bat-wing shaped deck enhances maneuverability and directs debris.

Powder-coated finish.

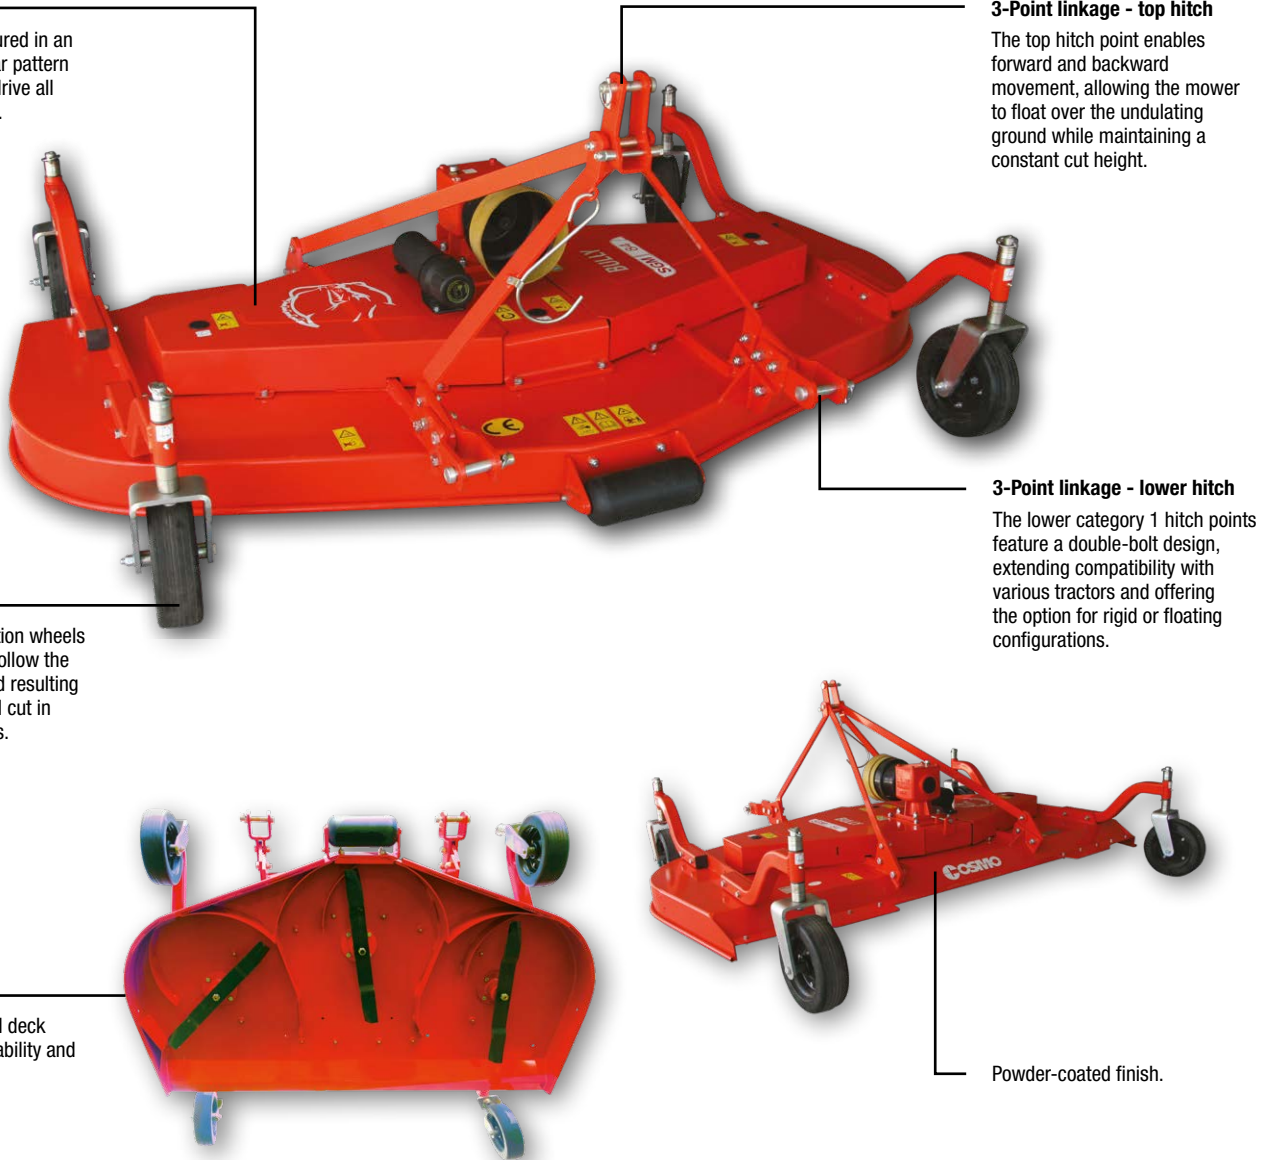

Code	TSGM150	TSGM180	TSGM210
Size reference	1.5m 5'0" 60"	1.8m 6'0" 72"	2.1m 7'0" 84"
Gearbox	60hp, 540rpm		
PTO shaft	Series 4		
Type of blade	Double-sided, stepped, suction		
Overall width (mm)	1620	1920	2220
Cutting width (mm)	1520	1820	2120
Cutting height (mm)	20 - 110		
Tractor range (hp)	25 - 60 21 - 50 @ PTO	35 - 60 29 - 50 @ PTO	45 - 60 38 - 50 @ PTO
Weight (kg)	225	250	300