

SRP Series Power Harrow



The BULLY SRP Series Power Harrows are versatile agricultural implements used for soil preparation and seedbed cultivation. Offering exceptional value with many features of high-end models, it is ideal for small/medium-sized landholdings.


The centrally mounted tower is constructed from folded metal components, reinforced and welded to create a robust one-piece design that bolts to the deck. The fully welded and reinforced main frame is engineered to ensure blade spindles and gears are aligned horizontally.

Rotating blades turn the soil, breaking it down into smaller particles and mixing in organic matter or crop residues. This process helps to improve soil structure and aeration, making it more suitable for seed planting and promoting better root development. The blade design reduces the horsepower requirements of the tractor and results in the ground being worked in fewer passes, even when working at the maximum depth (275mm). This means less soil compaction from the tractor and reduced fuel consumption.



Rear levelling bar

The mechanical height-adjustment bar retains soil in the chamber for longer to produce finely-tilled soil. Additionally, it functions as a scraper, leaving a smooth finish.

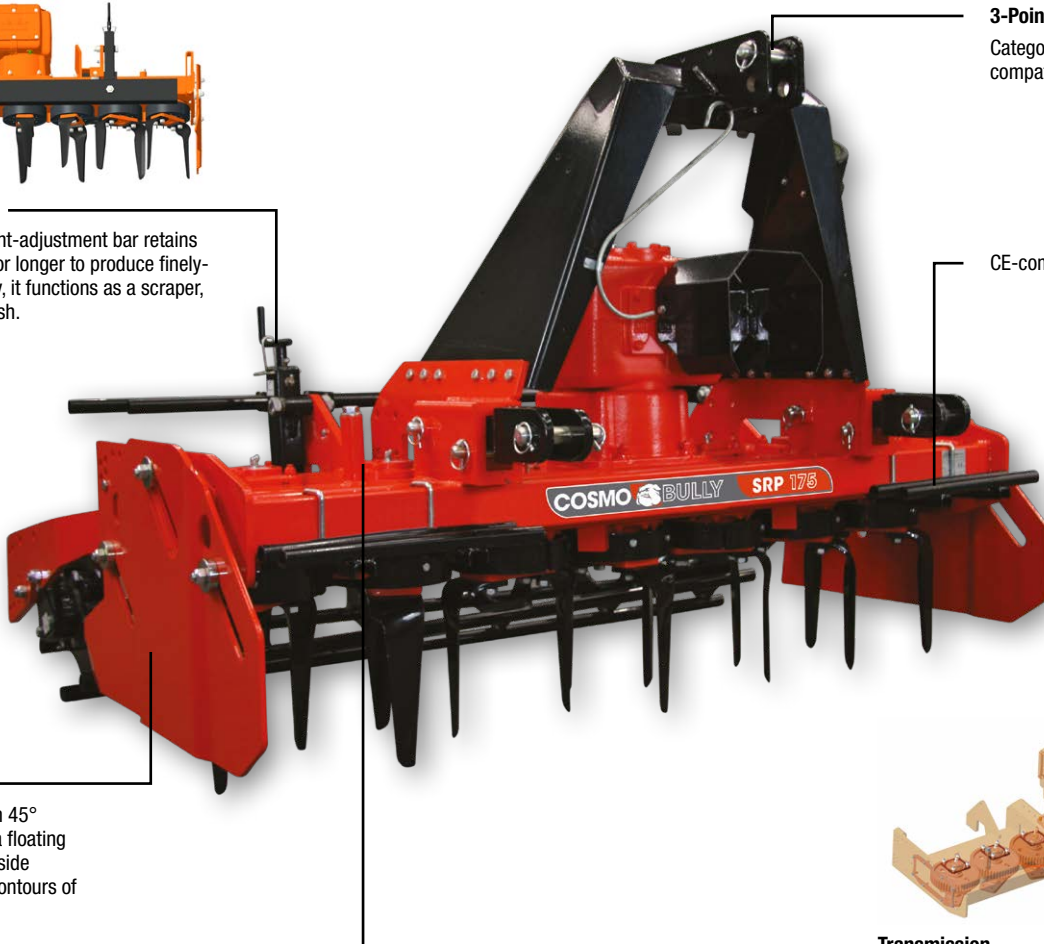


3-Point linkage

Category 2 & 3, quick-hitch compatible, double clevis mount.

CE-compliant guarding

Side plates

8mm side plates with 45° slotted holes create a floating design, enabling the side plates to follow the contours of the ground.

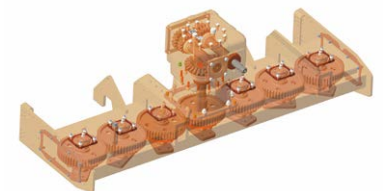

Transmission

A series of blade spindles counter-rotate on a vertical axis, with gears aligned horizontally for maximum contact and power transfer between blade spindles.

Code	TSRP150	TSRP175	TSRP200
Size reference	1.5m 5'0" 60"	1.75m 5'10" 70"	2.0m 6'8" 80"
Gearbox	90hp, 540/1000rpm, multi-speed		
PTO shaft/clutch	Series 8 with 200mm (8") friction clutch		
No. of rotors	6	7	8
Total no. of blades	12	14	16
Blades	285 x 12mm		
Overall width (mm)	1610	1860	2100
Working width (mm)	1500	1750	2000
Working depth (mm)	275		
Tractor range (hp)	50 - 90 42 - 75 @ PTO	60 - 90 50 - 75 @ PTO	70 - 90 58 - 75 @ PTO
Weight (kg)	545	590	590

BULLY SRP Series Power Harrows are equipped with long blades that facilitate a range of tilling depths from shallow (20mm) to deep (275mm). Operators seeking to till the top 20 - 50mm, for pasture renovation or due to limited quality topsoil, can pre-set the desired working depth by fitting an optional cage or packer roller to the harrow.

SRP Cage Rollers

Cage rollers are highly effective in dry, non-sticky or slightly damp soils. If your soil falls into these conditions, opting for a cage roller would be a smart choice to achieve the desired depth and seedbed quality during preparation.

Featuring a Ø385mm twisted and reinforced eight (8) bar design, the roller is equipped with a user-friendly multi-position positive locking pin-and-clip height adjustment system. This allows for quick and effortless adjustments while the roller pivots off a single front point for added convenience.




Code	TSRP150CR	TSRP175CR	TSRP200CR
Description	Bully SRP150 Cage Roller	Bully SRP175 Cage Roller	Bully SRP200 Cage Roller
Weight (kg)	76	84	92

SRP Packer Rollers

Packer rollers are versatile and well-suited for all soil types. They create beneficial grooves in the soil that aid in drainage, while individual scrapers, strategically placed between each row of teeth, effectively remove stickier soils.

The packer roller design features a Ø420mm solid pipe with welded shark fin-shaped teeth on 65mm spacings, equipped with scrapers. It also includes a multi-position positive locking pin-and-clip height adjustment system for easy and precise adjustments.

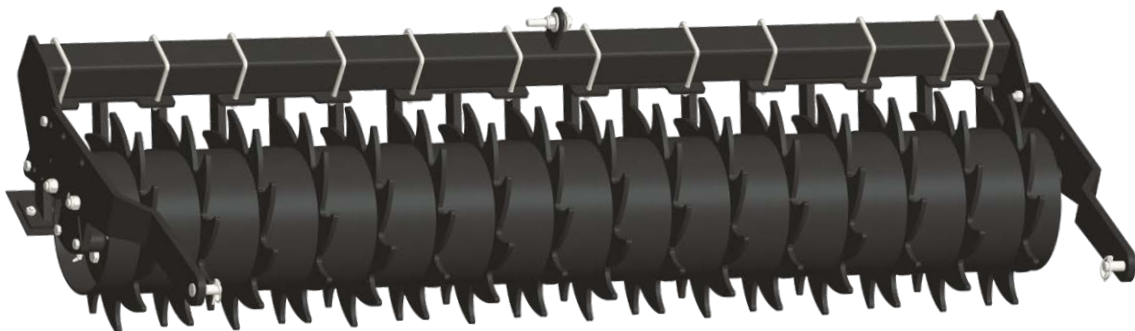

Code	TSRP150PR	TSRP175PR	TSRP200PR
Description	Bully SRP150 Packer Roller	Bully SRP175 Packer Roller	Bully SRP200 Packer Roller
Weight (kg)	158	177	196