

Enhance your tractor's capabilities with the remarkable BULLY UL Series Rotary Hoes. These gear-drive rotary hoes are designed for tractors ranging from 15 to 40hp and are one of our most popular implements for owner-operators tending to hobby farms, garden plots and narrow rows in crops and vineyards.

Designed with precision in Europe, our forward-action rotary hoe features a smart blade design. The six blades are mounted in a staggered speed configuration, creating a harmonious balance between power and efficiency.

Tackle tough soil conditions with confidence, as this rotary hoe is equipped with a reliable friction clutch for gearbox and transmission protection during demanding tasks. The chain-supported rear deflector is self-levelling, leaving a smooth finish after each use.

Side transmission

Gear-drive transmission for increased power transfer to the blades and ground. Includes an oil-level sight glass.

Powder-coated finish.

Front parking stand facilitates connection to tractor.

Skids


Four positive-locking positions with individual bolt holes.



3-Point linkage

Category 1, quick-hitch compatible, double clevis mount.

CE-compliant guarding.

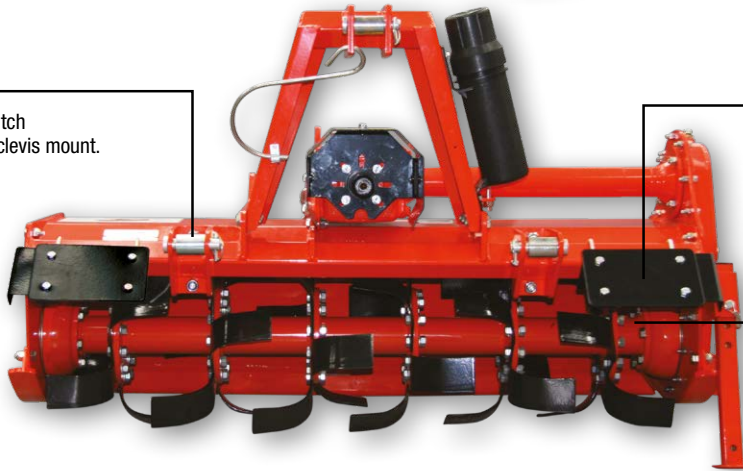

Blades

C-curved blades excel in cutting, turning, and refining softer or looser soil types. Their smoother cutting action requires less horsepower to produce a finer finish.

Code	TBUL36	TBUL48	TBUL60
Size reference	0.91m 3'0" 36"	1.2m 4'0" 48"	1.5m 5'0" 60"
Gearbox	40hp, 540rpm, single speed		
PTO shaft/clutch	Series 4 with 150mm (6") friction clutch		
Rotor diameter (mm)	375		
Rotor speed (rpm)	245		
No. of rotor flanges	4	6	7
No. of blades p/flange	6		
Total no. of blades	24	36	42
Overall width (mm)	1035	1340	1645
Working width (mm)	915	1220	1525
Working depth (mm)	165		
Tractor range (hp)	15 - 40 12.5 - 33 @ PTO	20 - 40 17 - 33 @ PTO	30 - 40 25 - 33 @ PTO
Weight (kg)	153	180	200