

VH Series Rotary Hoe



Discover the rugged BULLY VH Series Rotary Hoe – a heavy-duty, gear-driven powerhouse engineered in Europe for tractors ranging from 50 to 90hp. This versatile implement is designed to excel in various agricultural applications, making it ideal for both large-scale domestic and semi-commercial farming and horticulture.

Equipped with a multi-speed gearbox, the VH Rotary Hoe allows you to customise the input speed (540/1000rpm) and the blade tip speed, giving you precise control over your soil preparation.

The main frame boasts a robust and rigid construction with box section reinforcing for the category 2 and 3 lower linkage mounting points, ensuring durability and longevity even in demanding conditions.

Featuring a forward-action design, the VH Rotary Hoe delivers a super fine finish that leaves your soil perfectly pulverised. The spring-loaded tailgate keeps soil within the chamber, ensuring thorough contact with the blades for exceptional results and provides a smooth and even finish.


Adjustable spring-loaded tailgate enables the operator to retain material in the chamber until it is finely pulverised.



Skids

Five positive-locking positions with individual bolt holes.

CE-compliant guarding.

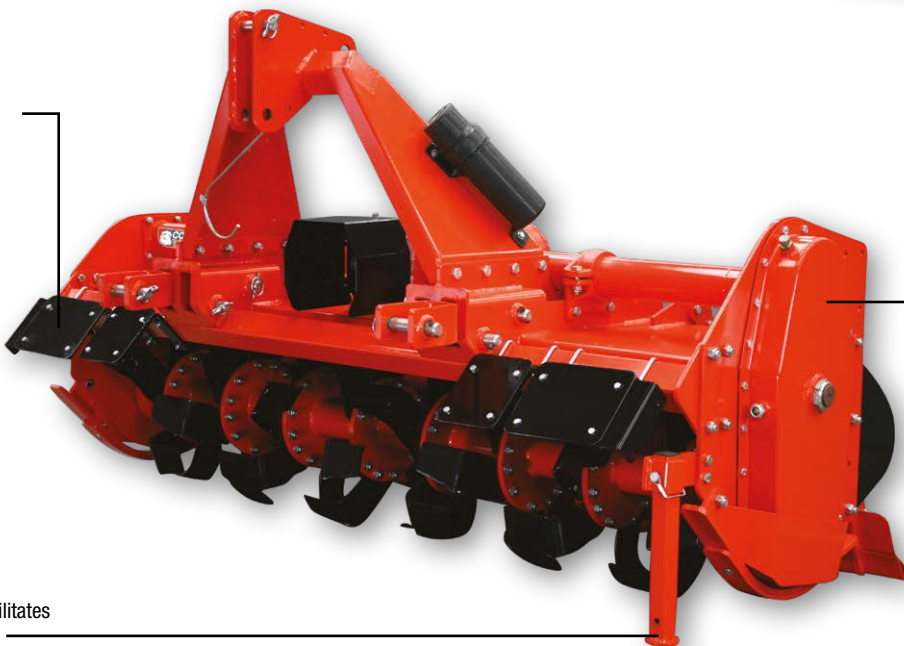

Side transmission


Gear-drive transmission ensures maximum power transfer to the blades and ground. The sturdy pressed metal cover houses three large side gears, sealed with a gasket to protect the oil from dirt. Check oil levels easily with the convenient sight glass.

Front parking stand facilitates connection to tractor.

3-Point linkage

Category 2 & 3, quick-hitch compatible, double clevis mount.

Powder-coated finish.

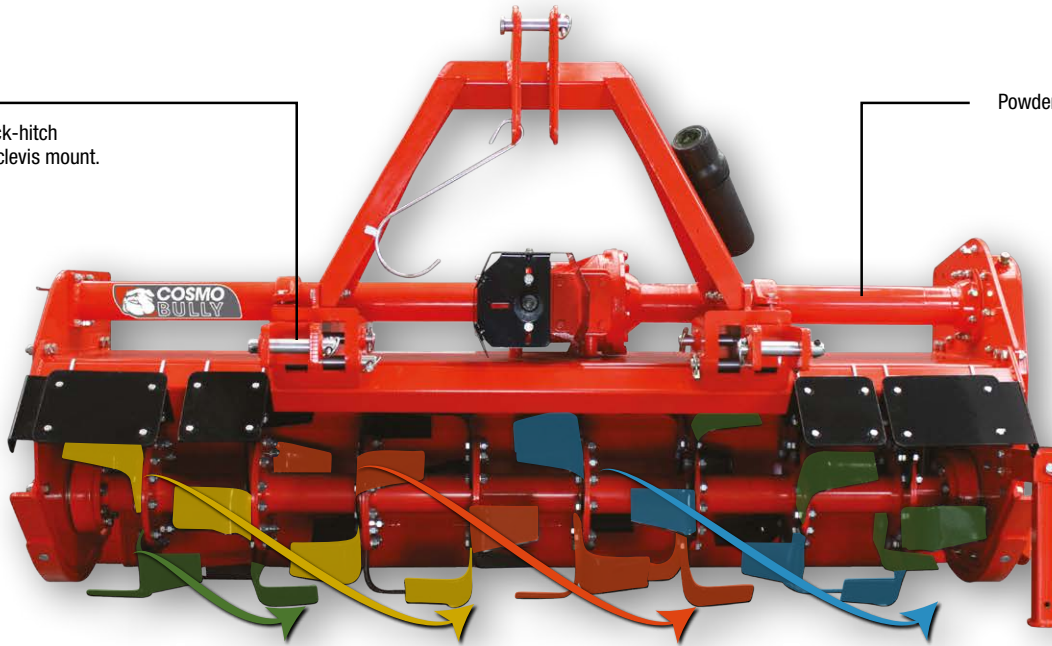

Blade configuration for optimal performance

The six-blades-per-flange configuration of the VH Series Rotary Hoe is a valuable engineering solution that reduces shock load through the machine, as the blade impact is staggered. It also optimises horsepower requirements, as more power is required to drive multiple blades through the ground simultaneously.

The VH Series Rotary Hoe comes standard with L-square blades, which excel in heavier, wetter and compacted soil. Their aggressive slicing, and enhanced soil penetration capabilities, break up and loosen heavy soil without clogging the chamber, making them more horsepower-efficient.

C-curved blades are available on request with an additional cost. Commonly used in softer or looser soil types, they offer a smoother cutting action, ideal for maintaining or finishing tasks, providing effective cutting and refining of soil without excessive disturbance.

Code	TBVH60	TBVH70	TBVH80
Size reference	1.5m 5'0" 60"	1.75m 5'10" 70"	2.0m 6'8" 80"
Gearbox	90hp, 540rpm, multi-speed (1000rpm option)		
PTO shaft/clutch	Series 8 with 200mm (8") friction clutch		
Rotor diameter (mm)	530 with L-square blades 561 with C-curved blades		
Rotor speed (rpm)	216, 242 or 271 at 540rpm 280 at 1000rpm		
No. of rotor flanges	6	7	8
No. of blades p/flange	6		
Total no. of blades	36	42	48
Overall width (mm)	1705	1945	2185
Working width (mm)	1540	1780	2020
Working depth (mm)	225		
Tractor range (hp)	50 - 90 42 - 75 @ PTO	60 - 90 50 - 75 @ PTO	70 - 90 58 - 75 @ PTO
Weight (kg)	631	672	715