## CX Series Fertiliser Spreader





The COSMO CX Series is a high-capacity professional spreader, designed to efficiently distribute pilled, granular or powdered fertiliser over an impressive width of up to 36m. Its slow rotating agitators protect fertiliser integrity and ensure an accurate and uniform spread.

The CX Spreader features twin hydraulically controlled openings, along with manual levers for presetting the discharge rate and spread pattern - be it one side (left or right) or full coverage (both left and right). The adjustable 'drop' position and spring-loaded vane adjustment system offer added flexibility.

Manufactured in Italy with meticulous attention to detail, the CX Spreader boasts a metal hopper, frame and gearbox drive system, all produced in-house for exceptional quality. Its components in contact with fertiliser are made from stainless steel, ensuring durability. An internal hopper grate prevents blockages, ensuring a consistent and optimal spreading pattern.



## **Spreading**

Twin openings are hydraulically controlled. Positive-locking manual levers allow operator to preset discharge rate and spread pattern; one side (left or right) or full coverage (both left and right).




Stainless steel double discs.

Three (3) gearboxes driven by a Series 4 PTO shaft with ratchet torque limiter.





The COSMO CX Series Fertiliser Spreader boasts a sturdy frame constructed from folded thick metal components, reinforced and welded to form a robust one-piece design. This box section frame provides a remarkable lift capacity of 3,200kg. The rectangular metal hopper has a standard capacity of 1500 litres, expandable with extensions to reach a maximum capacity of 3200 litres. Optional inspection ladders are available to assist the operator during loading.

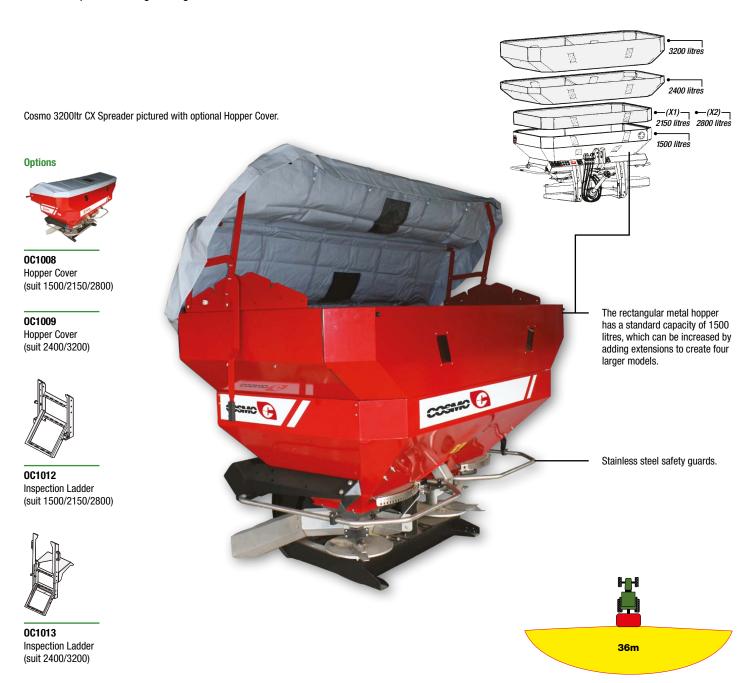

Code	CCX1500	CCX2150	CCX2400	CCX2800	CCX3200
Size reference	1500ltr Twin Disc Spreader	2150ltr Twin Disc Spreader	2400ltr Twin Disc Spreader	2800ltr Twin Disc Spreader	3200ltr Twin Disc Spreader
Capacity (It/kg)	1500 / 3800	2150 / 3800	2400 / 3800	2800 / 3800	3200 / 3800
Spreading width (m)	12 - 36				
Dimensions					
Width (mm)	2350		2800	2350	2800
Depth (mm)	1650				
Height (mm)	1200	1450	1550	1660	1700
Tractor range (hp)	90 - 180   75 - 150 @ PTO				
Weight (kg)	510	545	570	580	585



