


KANGA Carryalls are versatile implements designed for transporting a wide range of items, including hay bales, firewood, spray tanks, fence material, equipment, produce bags, firefighting equipment and tools.

Renowned for their exceptional quality, KANGA Carryalls stand as a benchmark in the industry. They feature a square tube frame and a kiln-dried timber floor, distinguishing them as one of the few carryalls in Australia to offer these premium features.

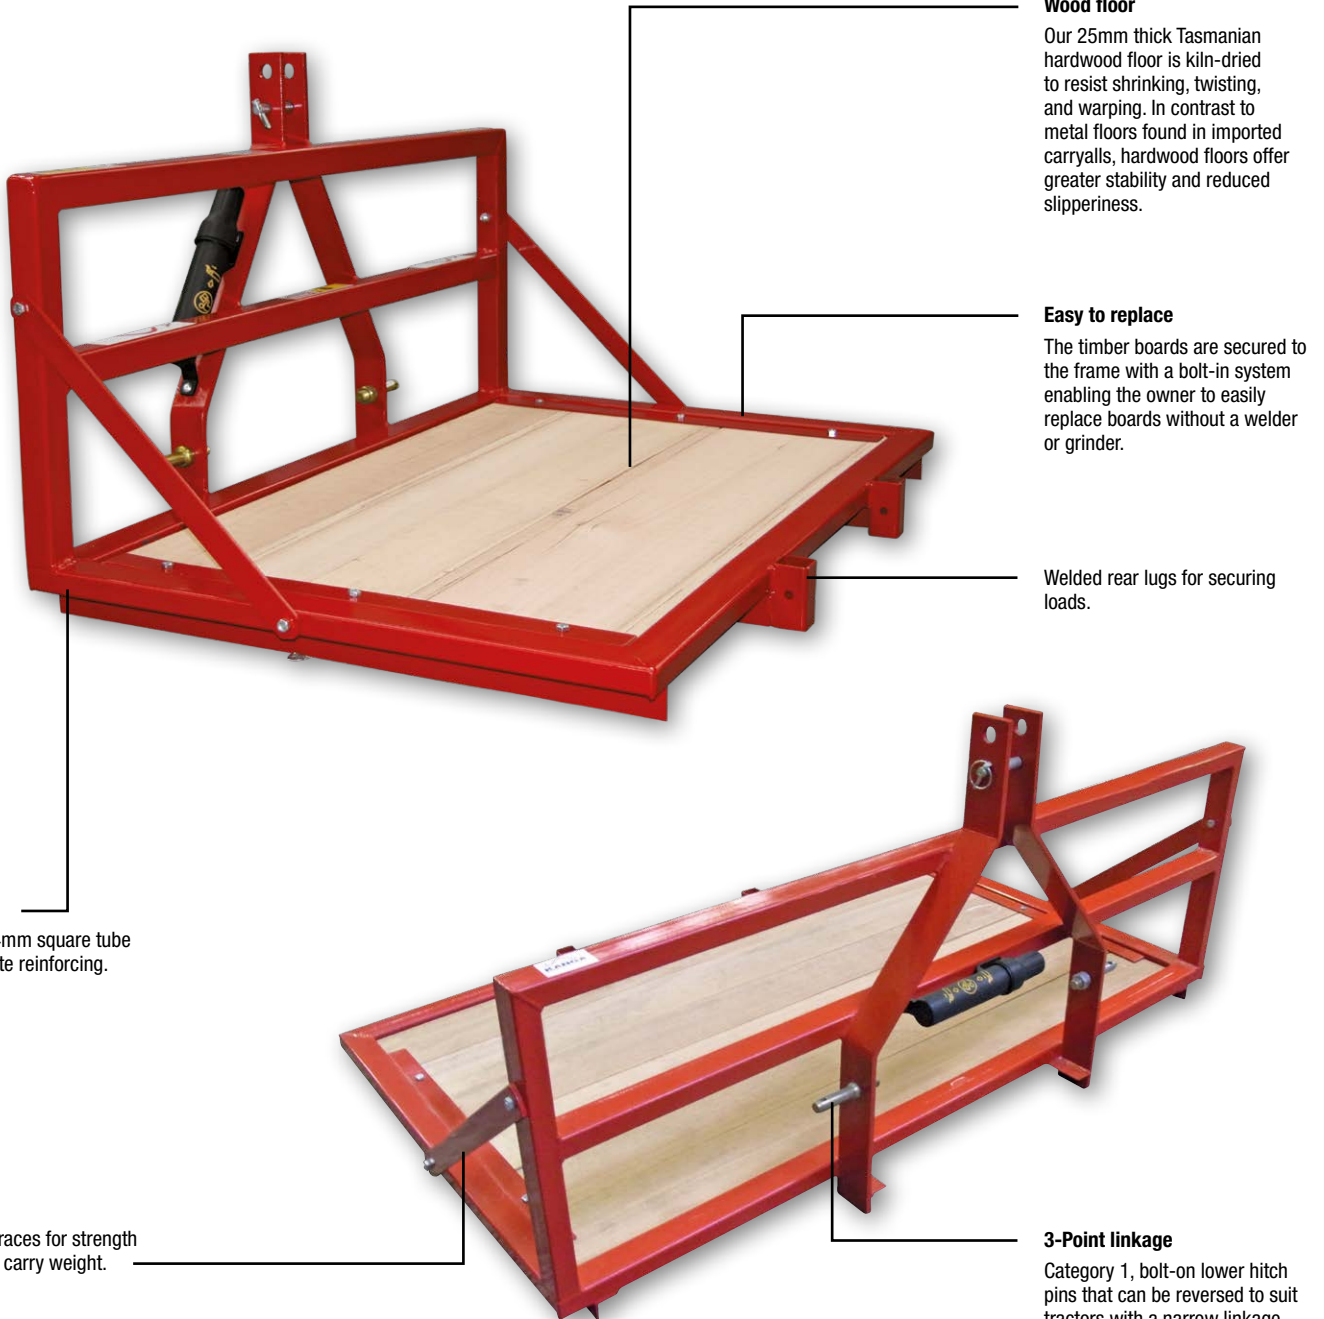

Wood floor

Our 25mm thick Tasmanian hardwood floor is kiln-dried to resist shrinking, twisting, and warping. In contrast to metal floors found in imported carryalls, hardwood floors offer greater stability and reduced slipperiness.

Easy to replace

The timber boards are secured to the frame with a bolt-in system enabling the owner to easily replace boards without a welder or grinder.

Welded rear lugs for securing loads.

Construction

Fully welded 4mm square tube with angle/plate reinforcing.

Bolt-on side braces for strength and increased carry weight.

3-Point linkage

Category 1, bolt-on lower hitch pins that can be reversed to suit tractors with a narrow linkage connection point.

Code	KCWF120	KCWF150	KCWF180
Size reference	1.2m 4'0"	1.5m 5'0"	1.8m 6'0"
Max. carry weight (kg)	600	750	900
Dimensions			
Width (mm)	overall 1240 floor 1200	overall 1540 floor 1500	overall 1840 floor 1800
Depth (mm)	overall 1060 floor 870		overall 1180 floor 990
Weight (kg)	53	68	85