


M Range 3 Tine Ripper



KANGA M Range 3 Tine Rippers, the perfect solution for tackling tough, compacted ground and transforming it into fertile, aerated soil. Engineered specifically for tractors in the 25 to 45hp range, these rippers deliver outstanding performance.

When working on virgin ground, these rippers can be used prior to a Rotary Hoe or Power Harrow. This reduces horsepower requirements, minimises strain on your implements, and decreases the number of passes needed to prepare the soil.

In secondary applications, these rippers excel at breaking up the compacted layer known as the pan, which can develop over time with the use of geared implements. This increases soil moisture retention and enhances crop yields.

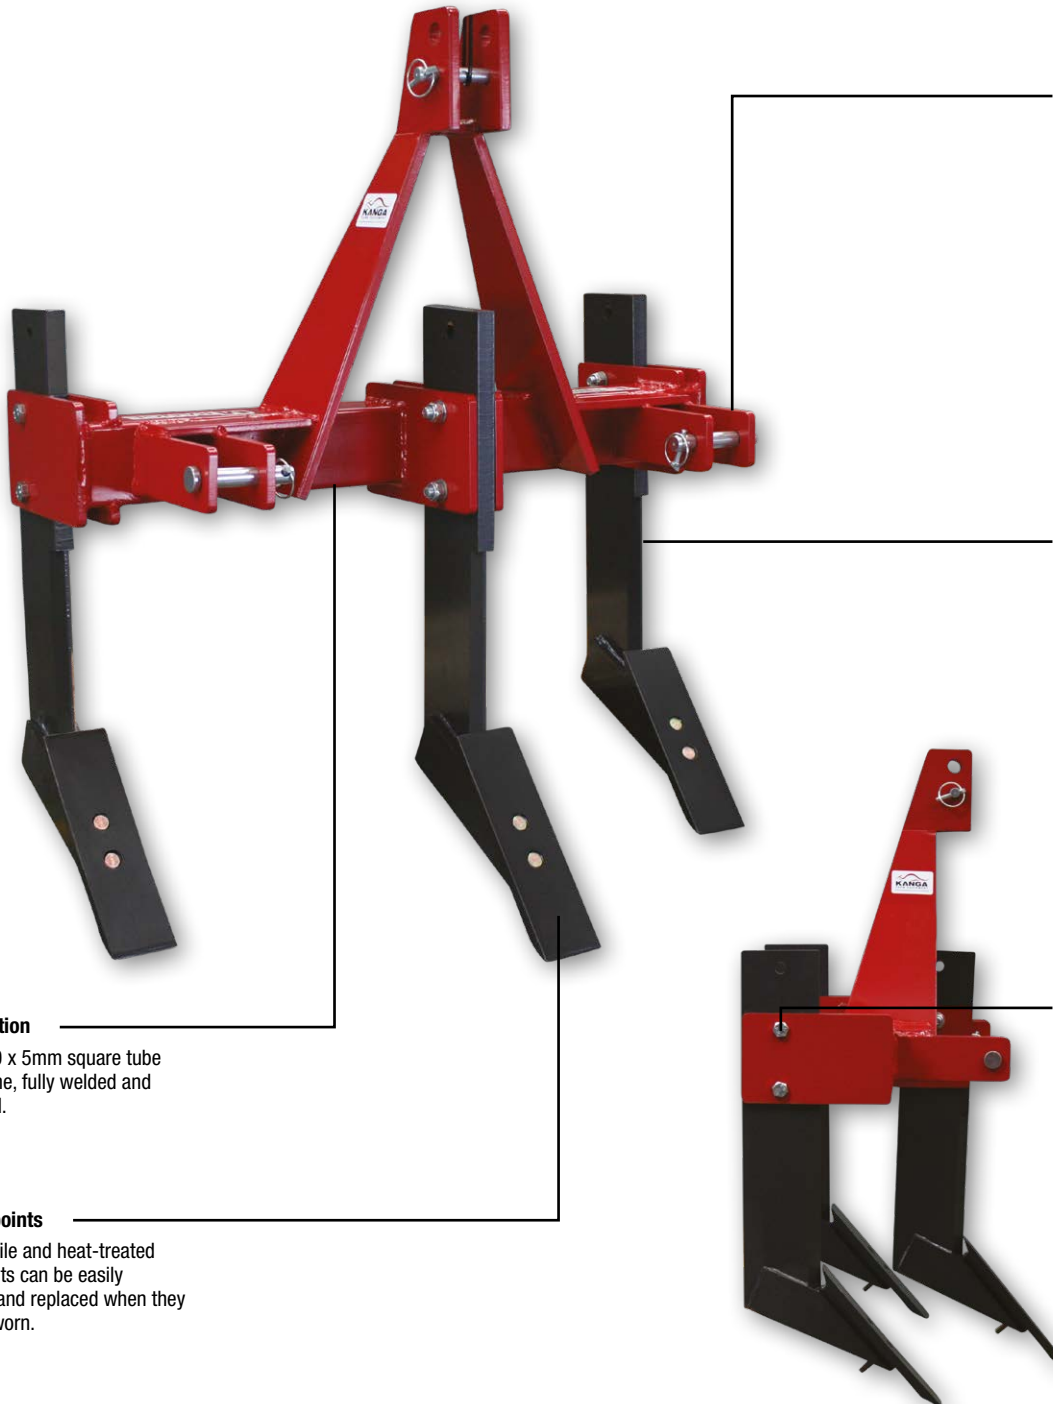

3-Point linkage

Category 1. Two-plate, double clevis mount designed to absorb lateral load and decrease metal fatigue.

Tine profile

A pointed 'V' like chamfer is cut into the leading edge of the tine, minimising surface disturbance and preserving the integrity of grass coverage.

Removable tines

Adjustable mild-steel tines have three height positions. Converts to a 2 Tine Ripper by removing centre tine.

Construction

100 x 100 x 5mm square tube main frame, fully welded and reinforced.

Bolt-on points

High-tensile and heat-treated wear points can be easily reversed and replaced when they become worn.

Code	KRM3
Tine profile	Height-adjustable, 130 x 25, chamfered edge
Working depth (max)	550mm
Weight (kg)	115
Tractor range (hp)	25 - 45 21 - 38 @ PTO