

Pasture Topper



KANGA Pasture Toppers are meticulously designed, engineered and manufactured in Australia to meet the highest standards. These toppers are suited to tractors ranging from 60 to 200 horsepower.

With two cutting widths, the KANGA Pasture Toppers feature robust construction and high-quality components. The open-back design of the KANGA Pasture Topper is equipped with a hydraulically controlled rear door. When the door is open, the lowered Bisalloy oval disc rotors, powered by high-speed gearboxes, discharge the cut material over a wide area. This ensures efficient and effective pasture management, contributing to improved grazing conditions.

Gearbox couplings

Heavy-duty spring cushion couplings transfer power between the gearboxes, while Danish Value Springs absorb shock loads from blade impact, prolonging the life of gearboxes and the drive line. Shock loads in the middle gearbox are absorbed by a 200mm (8") friction over-run clutch.



Gearbox

The 3-way centre gearbox facilitates the 90° turn of power required for twin-rotor cutters.




Skids

Removable, braced side skids. Four positive-locking individual slot positions in 30mm increments to preset cutting height.

Rear guard

Hydraulically adjustable rear guard with 8mm rubber flap for convenient and safe operation from the tractor seat.

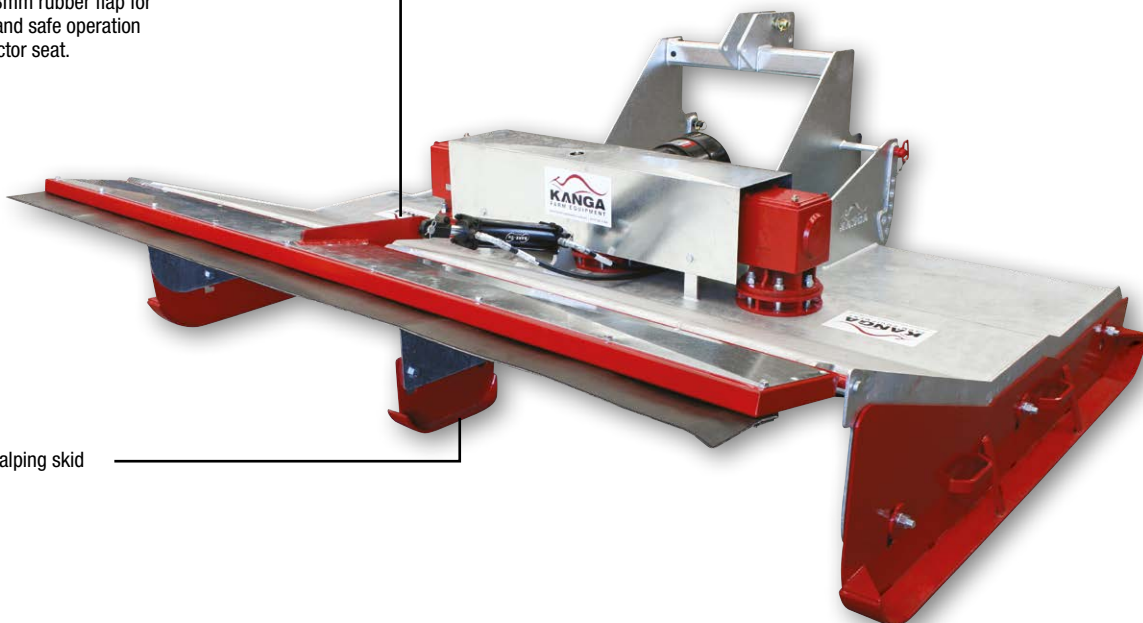

Rear anti-scalping skid




Oval disc rotors

Rounded corners and 360° spinning blades reduces impact related shock loads back through the drive train while the larger surface area helps the implement glide over obstacles such as check-banks, rocks and larger debris.

In situations where extensive grazing occurs, the condition of pasture can deteriorate due to stock activity. Feeding stock on rundown pastures leads to a decline in their condition and overall production. Regular topping is the most effective way to maintain pasture quality, minimise weed growth and boost yields.

Investing in the 3-Point linkage KANGA Pasture Topper means investing in the longevity and productivity of your pasture. With its superior design and Australian manufacturing excellence, this implement provides the reliability and performance needed to optimise your farming operations and achieve desirable results.

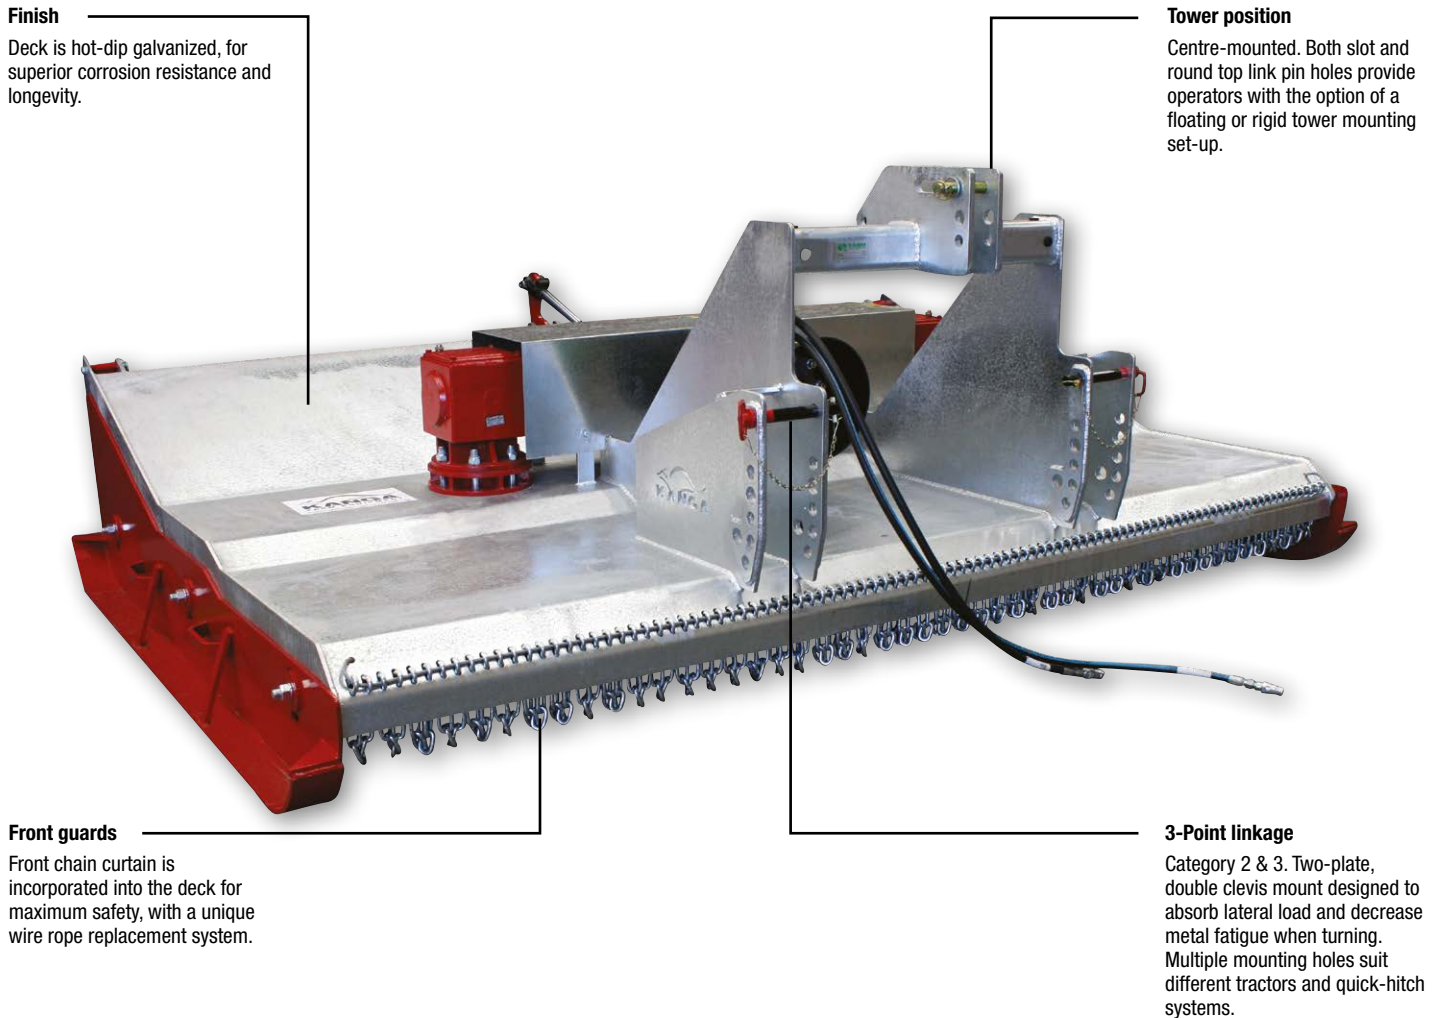

Finish
Deck is hot-dip galvanized, for superior corrosion resistance and longevity.

Tower position
Centre-mounted. Both slot and round top link pin holes provide operators with the option of a floating or rigid tower mounting set-up.

Front guards
Front chain curtain is incorporated into the deck for maximum safety, with a unique wire rope replacement system.

3-Point linkage
Category 2 & 3. Two-plate, double clevis mount designed to absorb lateral load and decrease metal fatigue when turning. Multiple mounting holes suit different tractors and quick-hitch systems.

Code	KT090 - 2.4	KT130 - 3.0	KT200 - 3.0
Size reference	2.4m 8'0" (90hp)	3.0m 10'0" (130hp)	3.0m 10'0" (200hp)
Construction	6mm, square, folded, clean-top deck with structural channel chassis and 10mm side walls		
Gearbox	90hp, 540rpm	130hp, 540rpm	200hp, 1000rpm
PTO shaft	Series 8	Series W2600	
Clutch	200mm (8") friction over-run clutch		
Rotor set-up	Lowered, overlapping and timed, bolt-together, oval disc rotor (Bisalloy)		
Blades	360° Spinning suction design, clockwise and anti-clockwise on hardened bushes		
Overall width (mm)	2540	3190	3190
Cutting width (mm)	2340	2890	2890
Cutting height (mm)	50 - 140		
Tractor range (hp)	60 - 90 50 - 75 @ PTO	80 - 130 67 - 109 @ PTO	80 - 200 67 - 167 @ PTO
Blade tip speed (ft/min)	19,620	16,560	15,710
Weight (kg)	690	1,350	1,350