


The COSMO BULLY™ SGM Finishing Mowers suit tractors with a power range of 25 to 60 horsepower. They are designed for maintaining lawns and grassed areas in locations such as private properties, parks, hospital grounds, schools and golf courses. These mowers are suited to applications where a consistent and tidy finish is required.

Three suction-type blades rotate at a high tip speed to produce a precise cut across fine and broad grass types. Cutting height is adjusted by adding or removing spacers on the caster wheel shafts, allowing the operator to set the mower to suit the terrain and desired result. An anti-scalping roller helps reduce the risk of uneven cuts and supports a uniform finish across the mowing area.

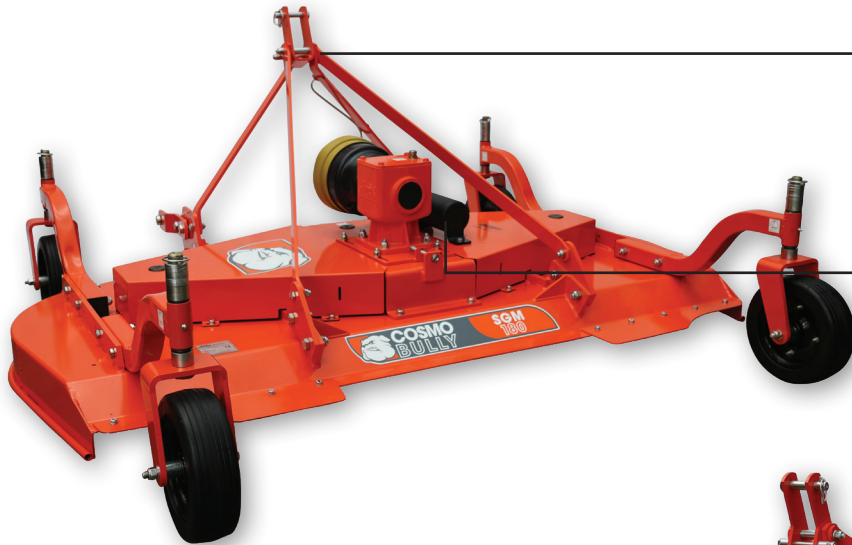

3-Point linkage - top hitch

The top hitch point enables forward and backward movement, allowing the mower to float over the undulating ground while maintaining a constant cut height.

Transmission

Two belts are configured in an overlapping triangular pattern that allows them to drive all three spindle pulleys.




3-Point linkage - lower hitch

The lower category 1 hitch points feature a double-bolt design, extending compatibility with various tractors and offering the option for rigid or floating configurations.

Wheels

Four, solid 360° rotation wheels allow the mower to follow the contour of the ground resulting in a precise and level cut in undulating conditions.

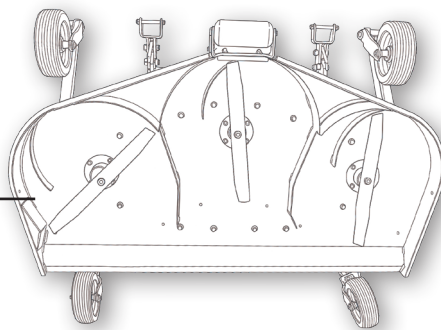

Design

The bat-wing shaped deck enhances manoeuvrability and directs debris.

Code	TSGM150	TSGM180	TSGM210
Size reference	1.5m 5'0" 60"	1.8m 6'0" 72"	2.1m 7'0" 84"
Tractor range (hp)	25 - 60 21 - 50 @ PTO	35 - 60 29 - 50 @ PTO	45 - 60 38 - 50 @ PTO
Gearbox	60hp, 540rpm		
PTO shaft	Series 4		
Type of blade	Double-sided, stepped, suction		
Overall width (mm)	1620	1920	2220
Cutting width (mm)	1520	1820	2120
Cutting height (mm)	20 - 110		
Weight (kg)	225	250	300
Price			