

FMA SERIES ROTARY HOE



The COSMO BULLY™ FMA Series Rotary Hoe suits compact and subcompact tractors rated between 15 and 28 horsepower. It's a practical choice for secondary soil preparation tasks such as loosening, mixing and aerating ground in gardens, small nurseries, landscaping projects and smallholding farms.

A chain-driven transmission powers the rotor at 145rpm, a speed typical for light-duty rotary hoes. This slower rotation supports thorough soil mixing and preparation without placing excessive strain on the implement or tractor. The rotor is fitted with C-curved blades in a four-blade-per-flange configuration, which helps turn and refine soil, particularly in softer conditions. A friction clutch helps manage load when working in tougher ground.

The rear deflector is chain-supported and self-levelling, helping to leave a smooth finish after each pass.

3-Point linkage


Category 1, quick-hitch, compatible double clevis mount.

Blades

Four-blade-per-flange configuration. C-curved blades excel in cutting, turning and refining softer or looser soil types. Their smoother cutting action requires less horsepower to produce a finer finish.

Side transmission

Chain-drive transmission with chain tensioner and oil-level sight glass.

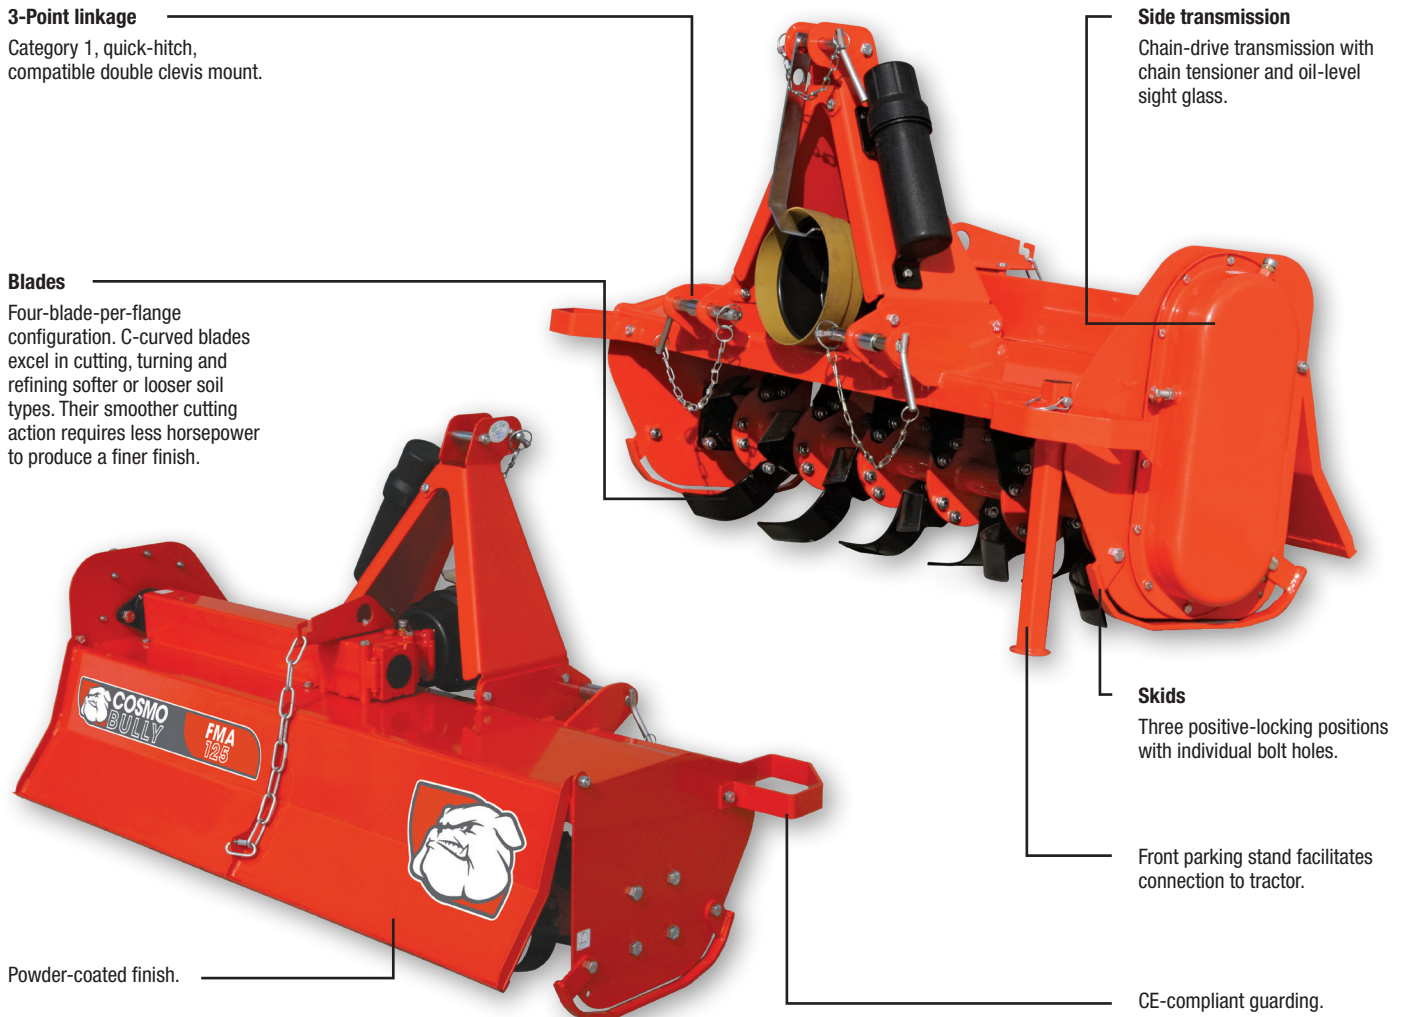

Skids

Three positive-locking positions with individual bolt holes.

Front parking stand facilitates connection to tractor.

CE-compliant guarding.

Powder-coated finish.

Code	TBFMA105	TBFMA125
Size reference	1.05m 3'5" 41"	1.25m 4'1" 49"
Tractor range (hp)	15 - 28 12.5 - 23 @ PTO	20 - 28 17 - 23 @ PTO
Gearbox	28hp, 540rpm, single speed	
PTO shaft/clutch	Series 4 with 150mm (6") friction clutch	
Rotor	speed 145rpm shaft Ø320mm	
No. of rotor flanges	5	6
No. of blades p/flange	4	
Total no. of blades	20	24
Overall width (mm)	1195	1340
Working width (mm)	1050	1250
Working depth (mm)	120	
Weight (kg)	130	140
Price		