LD RANGE GRADER BLADE

KANGA LD Range Grader Blades are compatible with tractors rated between 15 and 40 horsepower, making them suitable for compact setups across small-acre blocks and general farm maintenance. They are typically used for levelling, finish grading, backfilling and surface shaping.

Operators can adjust the blade's tilt, angle, and offset to suit site conditions and grading requirements. The tilt function allows the blade to be set up to 18°, supporting angled contact with the ground for shaping or crowning surfaces. The blade can be angled up to 30°, enabling material to be directed to one side during passes. Offset adjustment up to 45° allows the blade to be shifted laterally, which is useful for working close to fences, walls, or drainage lines. These adjustments are manually controlled using a pin-and-clip system. Reinforced pin holes and greaseable pivot points support ease of adjustment and facilitate routine maintenance.

KANGA's tapered main beam and involuted mouldboard profile assists with consistent material flow and clearance. Wings help contain material within the blade area, supporting efficient operation across varied terrain.

Mouldboard

6mm mouldboard can be reversed 180°, enabling efficient back blading by pushing material backwards.

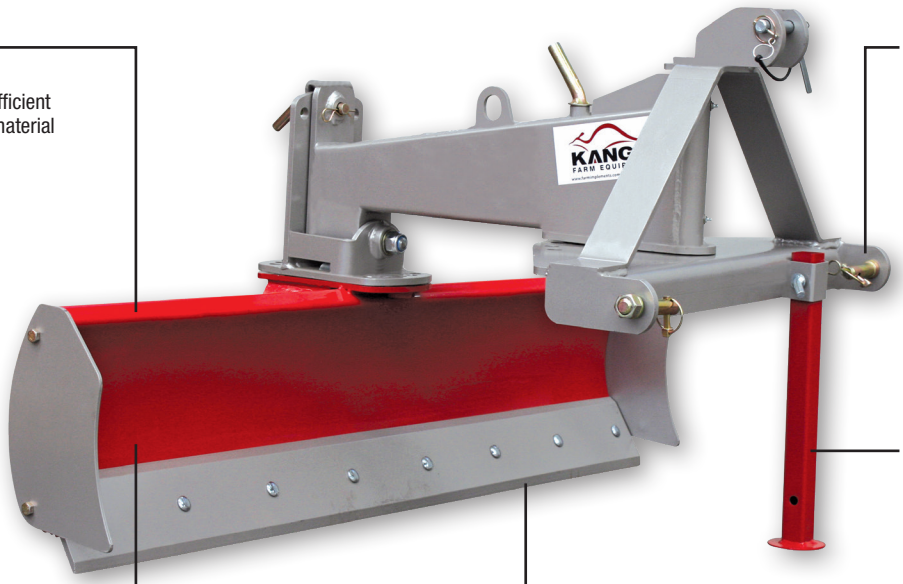

3-Point linkage

Category 1, bolt-on lower hitch pins that can be reversed to suit tractors with a narrow linkage connection point.

Front parking stand facilitates connection to tractor.

Reversible grading edge

Manufactured from high alloy BORON steel that is heat-treated, quenched and tempered.

Finish

High-build primer and agricultural enamel topcoat.



Angle



Offset



Tilt

Options

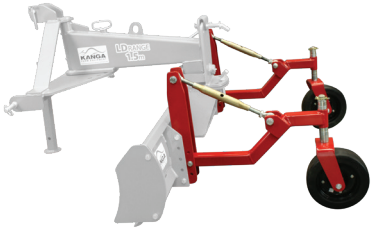

KBDDWK

Dual depth wheel kit

Code	KBLD120	KBLD150	KBLD180
Size reference	1.2m I 4'0" I 48"	1.5m I 5'0" I 60"	1.8m I 6'0" I 72"
Tractor range (hp)	15 - 40 I 12.5 - 33 @ PTO	22 - 40 I 19 - 33 @ PTO	25 - 40 I 21 - 33 @ PTO
Adjustment	Angle, offset and tilt		
Controlled by	Pins and clips		
Blade angle	5 positions = square, 2 left, 2 right I 15° & 30°		
Blade offset	7 positions = square, 3 left, 3 right I 15° (200mm), 30° (400mm) & 45° (600mm)		
Blade tilt	5 positions = square, 2 left, 2 right I 9° & 18°		
Overall width (mm)	1250	1550	1850
Weight (kg)	135	145	155
Price			