# LAND PLANE

Designed for tractors rated between 20 and 75 horsepower, KANGA Land Planes are a practical implement for reconditioning and redistributing loose material across a surface. It's commonly used to maintain gravel driveways, dirt roads and construction sites, and can also assist with cleaning barns, arenas and animal enclosures.

Land planes offer a more straightforward alternative to traditional grader blades. Rather than relying on frequent angle adjustments, the KANGA Land Plane uses a fixed frame with front-mounted tines and grading edges to loosen and spread material evenly. This design helps operators maintain a consistent working depth and achieve a smoother finish with reduced manual input.

The bolt-on skid runners with tapered leading and trailing edges help the implement move steadily across uneven terrain. The front tines are used to break through compacted surface layers and can be adjusted or removed depending on the task. When material begins to build up along the front edge, it is recommended to raise the tines to reduce resistance and allow the grading edges to take over.

Land planes are best suited for maintaining already loose or lightly compacted surfaces where a consistent level is the goal, rather than aggressive reshaping or material relocation.

**Construction**

A welded, rigid box design braced left to right with box section and front to rear with flat bar.

**3-Point linkage**

Category 1. Two-plate, double clevis mount designed to absorb lateral load when turning; increasing implement longevity.

**Ripping**

Tine slots in the 100 x 100 x 5mm RHS toolbar are reinforced. Front tines are high-tensile steel and height adjustable, either individually or as a set. Tip of tine has a high-tensile point that is replaceable with a knock-on/ knock-off design.

**Height-adjustable grading edges**

150 x 12mm. Manufactured from high alloy BORON steel that is heat-treated, quenched and tempered. Reversible to extend lifespan.

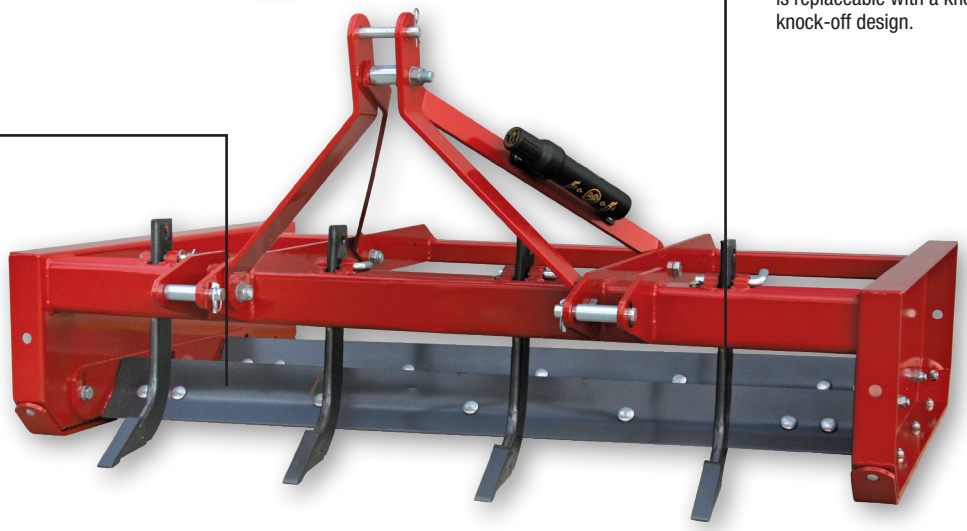

| Code | KLP150 | KLP210 |
|---|---|---|
| Size reference | 1.5m I 5'0" I 60" | 2.1m I 7'0" I 84" |
| Tractor range (hp) | 20 - 40 I 17 - 33 @ PTO | 35 - 75 I 29 - 63 @ PTO |
| No. of tines | 4 | 6 |
| Working width (mm) | 1520 | 2130 |
| Overall width (mm) | 1650 | 2300 |
| Weight (kg) | 233 | 293 |
| Price | | |