M RANGE ROTARY CUTTER

KANGA M Range Rotary Cutters suit tractors rated between 50 and 85 horsepower, making them a practical choice for land management across larger properties and more challenging terrain. The KANGA M Range Rotary Cutter features a 4mm steel deck with full underside reinforcement. Its clean-top deck prevents debris build-up and water pooling, and when paired with the hot-dip galvanised finish, it enhances surface protection and contributes to the implement's longevity.

Manufactured in Australia and refined over more than 30 years, these implements reflect ongoing feedback from farmers and dealers. They are well-suited to clearing scrub, managing regrowth, maintaining fence lines, creating fire breaks and tending to nature strips or regional airfields.

3-Point linkage

Category 1 & 2. Two-plate, double clevis mount designed to absorb lateral load and decrease metal fatigue when turning.

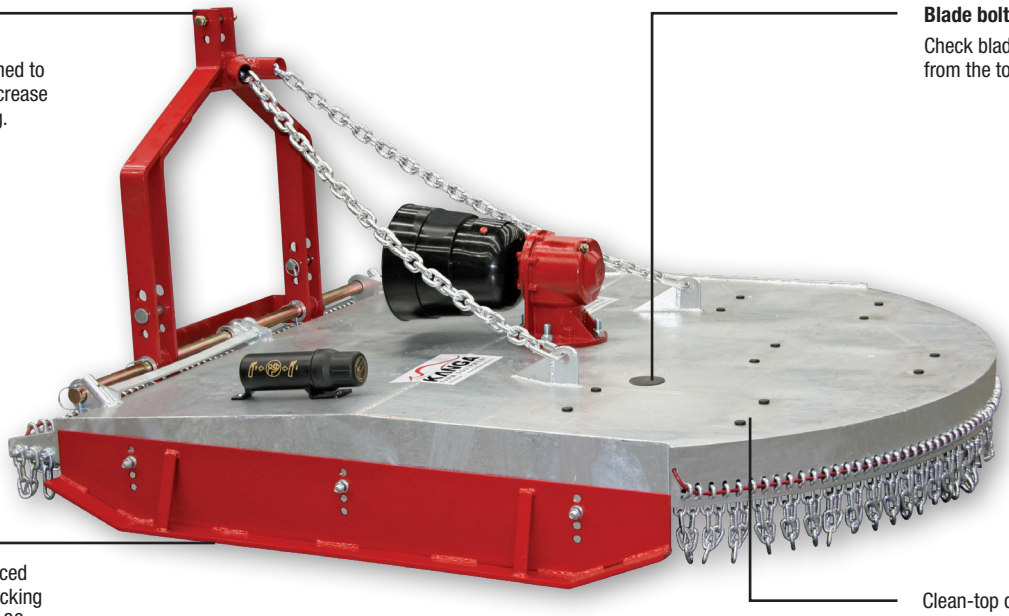

Blade bolt inspection cap

Check blades and blade bolts from the top of the implement.

Skids

Reversible, removable, braced side skids. Four positive-locking individual hole positions in 30mm increments to preset cutting height.

Clean-top deck with galvanized finish for long-lasting protection.

M RANGE ROTARY CUTTER

A multi-position sliding tower allows the cutter to be mounted directly behind the tractor or offset to either side, making it easier to work along fence lines, boundaries or under low-hanging branches. The lowered, reinforced cutter bar works in conjunction with a high-speed, high-ratio gearbox to discharge cut material efficiently while maintaining blade tip speed.

Blade exclusion zones

A safety feature to prevent accidental contact with blades.

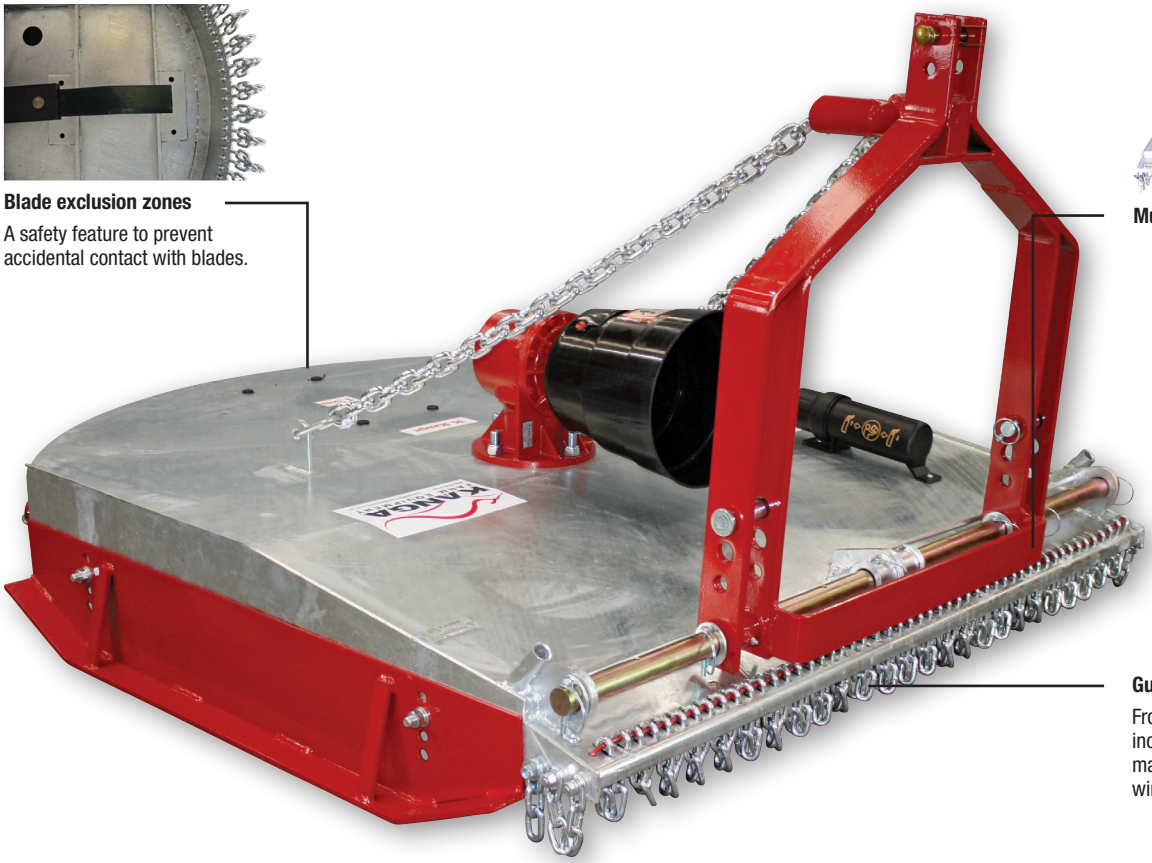

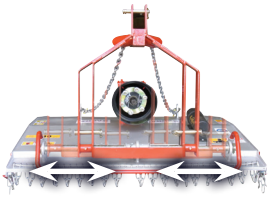

Multi-position sliding tower

Guards

Front and rear chain curtains are incorporated into the deck for maximum safety, with a unique wire rope replacement system.

Options

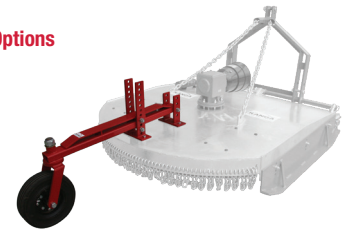

KHRDW

HD depth wheel (each)

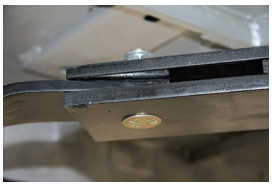

Countersunk blade bolts

This design avoids wear and tear. Unfasten the lock nut to replace blades throughout the lifetime of the implement.

Code	KSMR150	KSMR180	KSMR210
Size reference	1.5m I 5'0" I 60"	1.8m I 6'0" I 72"	2.1m I 7'0" I 84"
Tractor range (hp)	50 - 85 I 42 - 71 @ PTO	60 - 85 I 50 - 71 @ PTO	70 - 85 I 58 - 71 @ PTO
Construction	4mm, round-back, clean-top deck with reinforced subframe		
Gearbox	75hp, 540rpm, 1:1.93 ratio		75hp, 540rpm, 1:1.46 ratio
PTO shaft/clutch	Series 6 with 200mm (8") friction clutch		
Cutter bar	Lowered, bolt-together, high-tensile/spring steel, sandwich design		
Blades	Two (2) stepped, suction, spring steel pivoting on hardened bushes		
Blade tip speed	16400ft/min I 83.3m/s	19680ft/min I 99.3m/s	17370ft/min I 88.2m/s
Overall width (mm)	1710	2010	2310
Cutting width (mm)	1500	1800	2100
Cutting height (mm)	50 - 140		
Weight (kg)	390	490	530
Price			