
## **UM Series Rotary Hoe**



BULLY UM Series Rotary Hoes are medium-duty gear drive implements designed for tractors with a range of 35 to 50hp. Offering features and accessories that are typically only found in high-end implements, they are the perfect choice for medium-sized farms, garden plots or semicommercial operations where usage is sporadic.

Designed with precision in Europe, our forward-action rotary hoe features a smart blade design. The six blades are mounted in a staggered speed configuration, creating a harmonious balance between power and efficiency.

Tackle tough soil conditions with confidence, as this rotary hoe is equipped with a reliable friction clutch for gearbox and transmission protection during demanding tasks. The chain-supported rear deflector is self-levelling, leaving a smooth finish after each use.

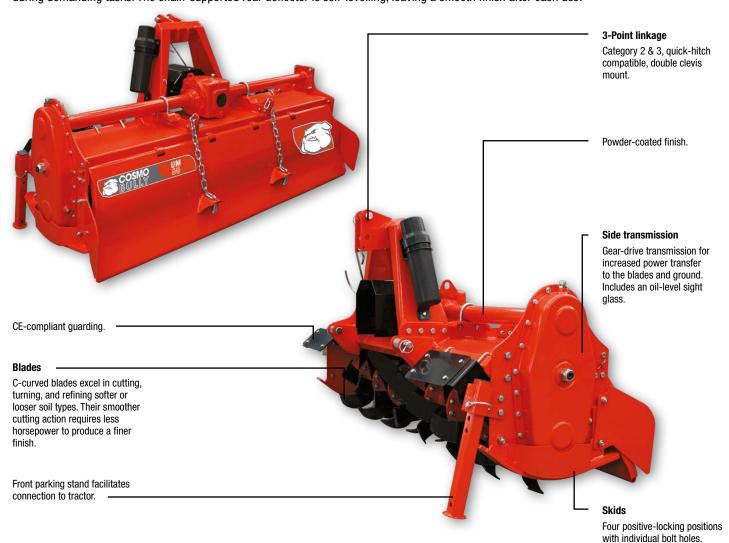

Code	TBUM60	TBUM72
Size reference	1.5m   5'0"   60"	1.8m   6'0"   72"
Gearbox	50hp, 540rpm, single speed	
PTO shaft/clutch	Series 4 with 150mm (6") friction clutch	
Rotor diameter (mm)	434	
Rotor speed (rpm)	241	
No. of rotor flanges	8	9
No. of blades p/flange	6	
Total no. of blades	48	54
Overall width (mm)	1775	1970
Working width (mm)	1650	1830
Working depth (mm)	180	
Tractor range (hp)	35 - 50   29 - 42 @ PTO	40 - 50   33 - 42 @ PTO
Weight (kg)	285	310





