P Series Fertiliser Spreader

The COSMO P Series Fertiliser Spreaders offer a simple, effective and economical solution for spreading pilled, granular or powdered fertiliser and seed accurately from 6 to 14m. The metal hopper is spun from a single sheet of steel in Italy, creating a strong hopper without seam or join welds. Painted in COSMO's state-of-the-art automated paint factory, the high-quality finish ensures long-lasting durability.

Options

619.012
Lime agitator

620.102
Single-side distributor



620.106
Twin-side distributor

902.002
Hopper cover (P300)

902.003
Hopper cover (P500)

619.111
Hydraulic opening system

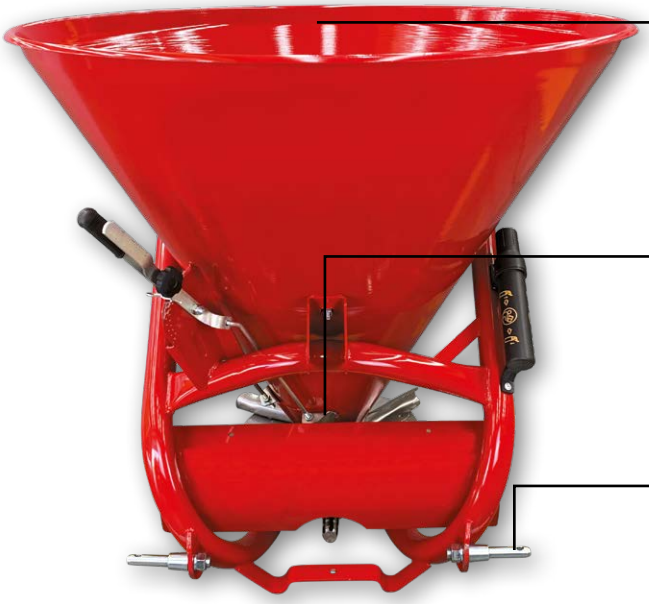

Hopper
Conical shape minimises fertiliser wastage while the smooth internal finish ensures even distribution to the exits.

Twin exits
Lateral (side) exits provides versatile spreading options, allowing the operator to achieve left, right or full coverage.

3-Point linkage
Category 1, bolt-on lower hitch pins that can be reversed to suit tractors with a narrow linkage connection point.

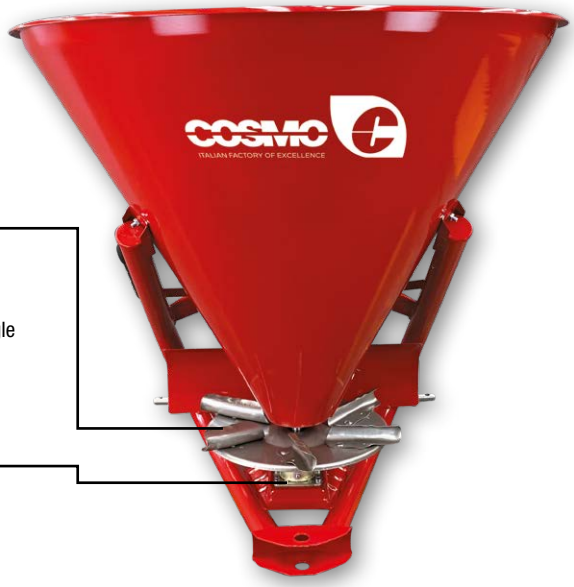

Stainless steel disc
Six adjustable vanes offer additional spreading pattern adjustment, while the direct drop of material onto the single spinner disc ensures uniform and precise distribution.

Drive system
Series 2 PTO shaft driving a single-speed, pressed metal, grease packed, gearbox.

Code	CP300	CP500
Size reference	300ltr Metal Hopper	500ltr Metal Hopper
Capacity (lt/kg)	320 / 318	450 / 449
Spreading width (m)	6 - 14	
Dimensions		
Width (mm)	*1050*	*1110*
Depth (mm)	*1050*	*1110*
Height (mm)	*1090*	*1170*
Tractor range (hp)	20+ I 17+ @ PTO	35+ I 29+ @ PTO
Weight (kg)	58	63