


M120 SERIES POWER HARROW



The COSMO BULLY™ M120 Series Power Harrow is compatible with tractors rated between 100 and 160 horsepower, making it a strong fit for professional operators working across larger landholdings. This implement is best suited for seedbed preparation, pasture renovation and soil conditioning. It can be used to break up clumps, increase aeration and remove surface weeds, helping to create a fine, evenly cultivated seedbed while minimising compaction and erosion.

A series of counter-rotating blades mounted on vertical spindles work the soil to a maximum depth of 285mm. The blade layout allows the ground to be worked in fewer passes, helping reduce fuel consumption and tractor load. Operators can pre-set working depth for shallow tilling using optional cage or packer rollers, depending on soil type and conditions. The implement is equipped with a 160 horsepower rated, multi-speed gearbox to support efficient operation.

The main frame is fully welded and reinforced to support horizontal alignment of blade spindles and gears. A centrally mounted tower, constructed from folded and welded metal components, bolts securely to the deck. Top and lower linkage mounting points support Category 2 and 3 compatibility.

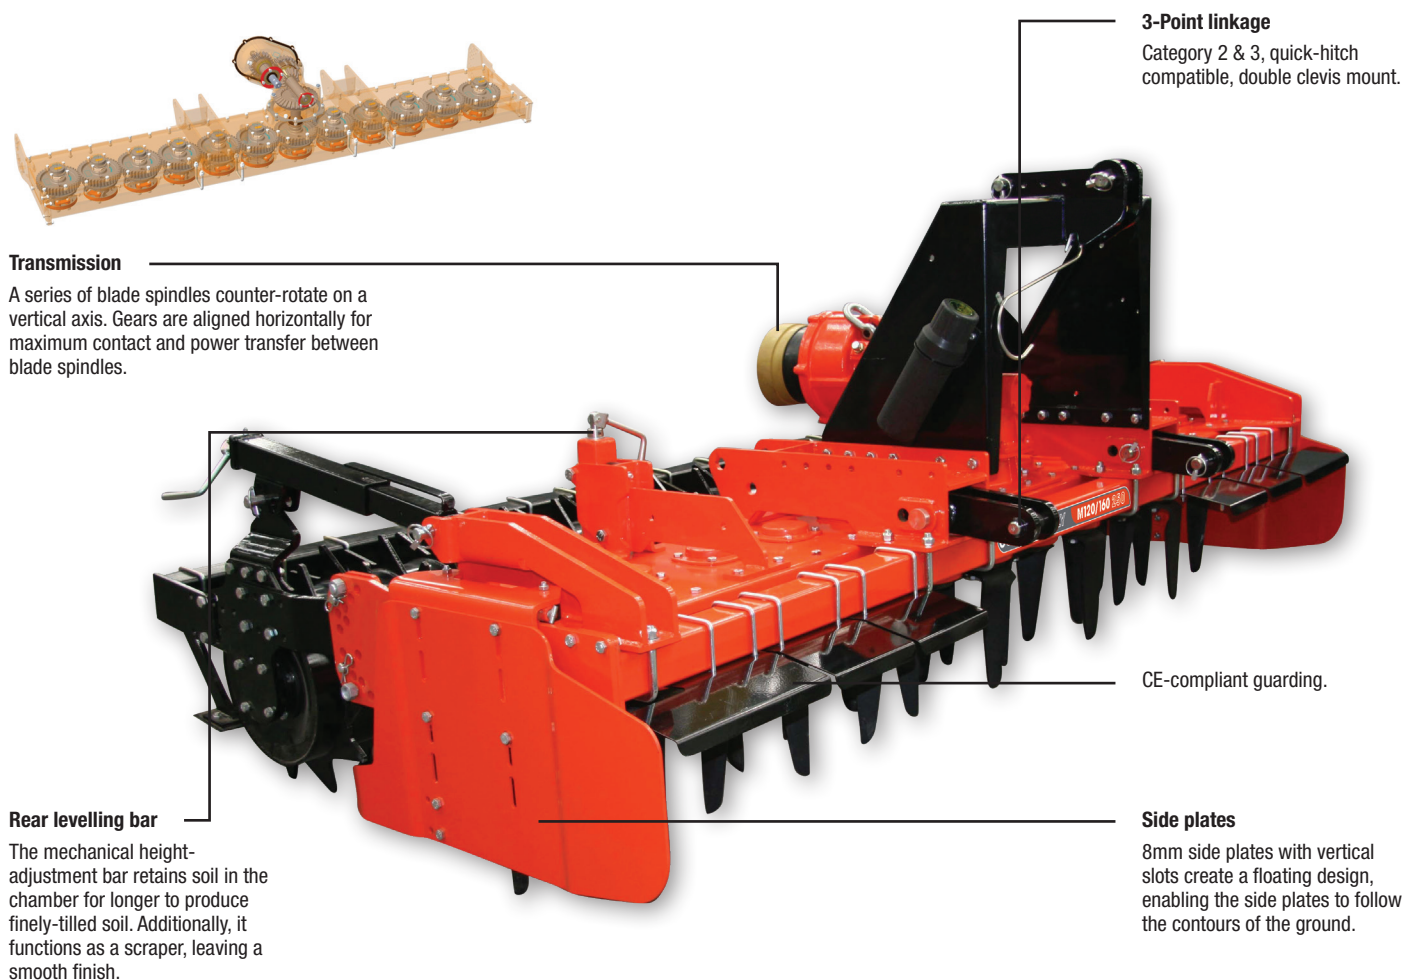


Code	TM120/160-250	TM120/160-300
Size reference	2.5m 8'2" 98"	3.0m 9'10" 118"
Tractor range (hp)	100 - 160 84 - 134 @ PTO	120 - 160 100 - 134 @ PTO
Gearbox	160hp, 540/1000rpm, multi-speed	
PTO shaft/clutch	Series W2600 with 200mm (8") friction clutch	
No. of rotors	10	12
Total no. of blades	20	24
Blades	295 x 12mm	
Overall width (mm)	2600	3100
Working width (mm)	2500	3000
Working depth (mm)	285	
Weight (kg)	850	950
Price		

COSMO BULLY™ M120 Series Power Harrows are equipped with long blades that support a range of tilling depths, from shallow (20–50mm) to deep (285mm). Operators looking to till the top 20 - 100mm — for pasture renovation or where topsoil is limited — can pre-set the working depth by fitting an optional cage or packer roller to the harrow.

M120 Cage Rollers

Cage rollers are highly effective in dry, non-sticky or slightly damp soils. If your soil falls into these conditions, opting for a cage roller would be a smart choice to achieve the desired depth and seedbed quality during preparation.

Featuring a Ø450mm, twisted, and reinforced eight (8) bar design, the roller is equipped with a user-friendly multi-position positive locking pin-and-clip height adjustment system that includes a mechanical ratchet screw adjuster. This allows for quick and effortless adjustments while the roller pivots off a single front point for added convenience.

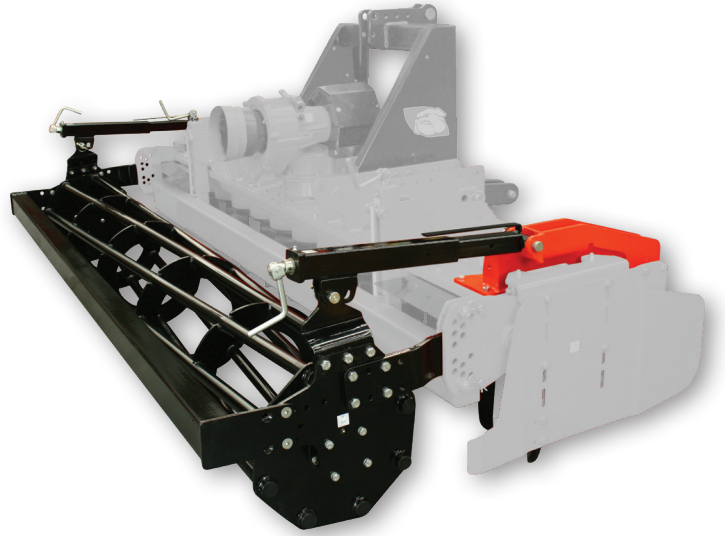

Code	TM120/160-250CR	TM120/160-300CR
Description	COSMO BULLY™ M120-250 Cage Roller	COSMO BULLY™ M120-300 Cage Roller
Weight (kg)	145	166
Price		



M120 Packer Rollers

Packer rollers are versatile and well-suited for all soil types. They create beneficial grooves in the soil that aid in drainage, while individual scrapers, strategically placed between each row of teeth, effectively remove stickier soils.

The packer roller design features a Ø500mm solid pipe with welded shark fin-shaped teeth on 80mm spacings, equipped with scrapers. It also includes a multi-position positive locking pin-and-clip height adjustment system, that includes a mechanical ratchet screw adjuster, for easy and precise adjustments.

Code	TM120/160-250PR	TM120/160-300PR
Description	COSMO BULLY™ M120-250 Packer Roller	COSMO BULLY™ M120-300 Packer Roller
Weight (kg)	305	360
Price		