XH RANGE POST HOLE DIGGER

KANGA XH Range Post Hole Diggers are hydraulic-assist, down-pressure diggers specifically engineered for category 2 three-point linkage tractors rated from 40 to 100 horsepower.

Equipped with either a 50 or 70 horsepower gearbox, the XH Range Post Hole Digger allows gradual application of down-pressure to the auger through the hydraulic ram. This feature helps penetrate compacted layers of shale, clay, or other challenging soil types.

The design of this post hole digger ensures that the lower linkage arms of the tractor lock the frame securely in place when in the correct position. Jigging, or raising and lowering of the auger, is conveniently controlled using the 3" hydraulic ram only.

As an added safety measure, shear bolts have been incorporated into the design to protect against potential damage in case the operator forgets to use the hydraulic ram and instead uses the tractor linkage.

3-Point linkage - top hitch

Extendable, and adjustable, hitch with shear bolts that safeguard against damage.

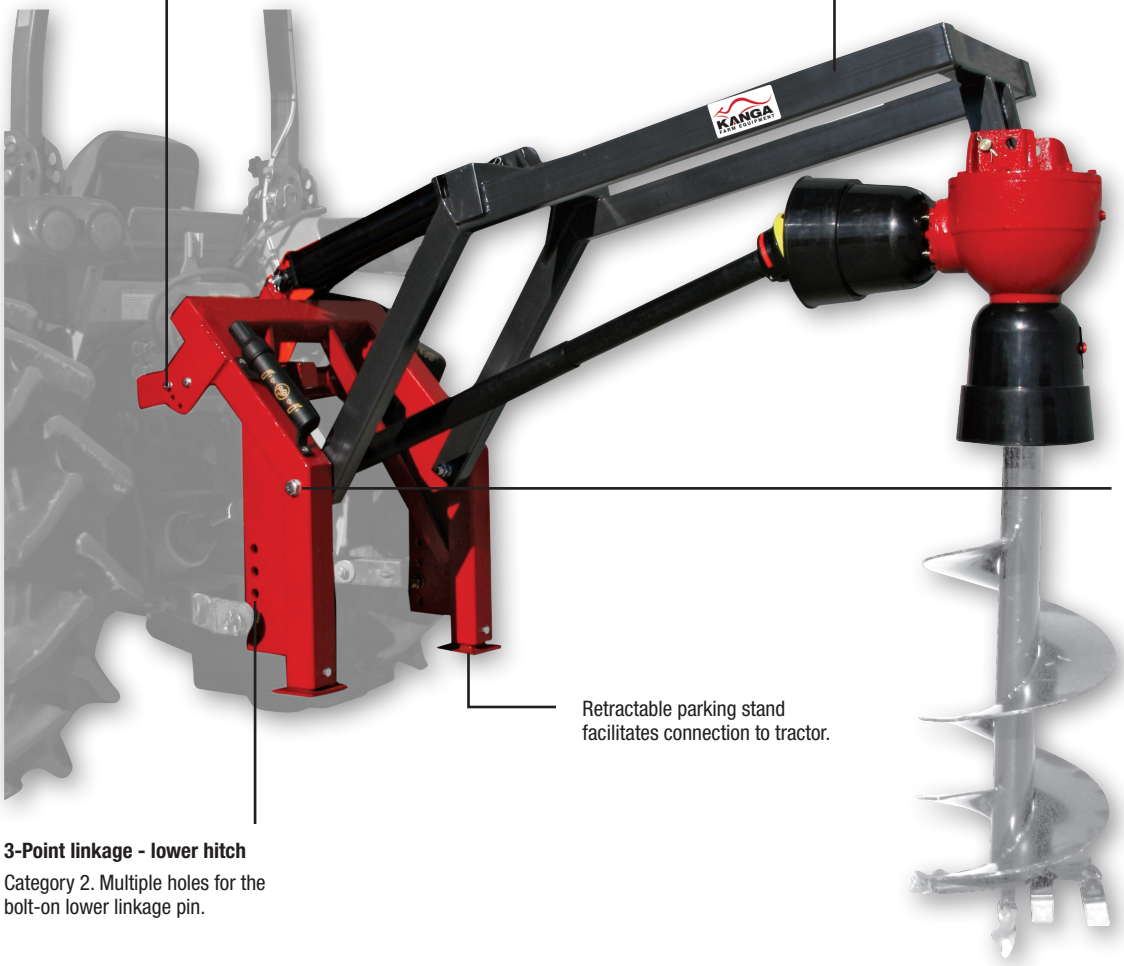

Boom

Heavy-duty, dual-rail frame, fabricated from RHS steel. Fully welded, gusseted and reinforced around load-bearing points.

Connection point

Bushing welded into the arms facilitates the pivot and connection between the two main parts.

Retractable parking stand facilitates connection to tractor.

3-Point linkage - lower hitch

Category 2. Multiple holes for the bolt-on lower linkage pin.

Code	KPHD50-XH	KPHD75-XH
Tractor range (hp)	40 - 70 I 33 - 58 @ PTO	50 - 100 I 42 - 84 @ PTO
Gearbox	50hp, 540rpm, 3.18:1 reduction ratio	75hp, 540rpm, 4.1:1 reduction ratio
PTO shaft/clutch	Series 4 with 150mm (6") 40hp friction clutch	Series 4 with heavy-duty 150mm (6") 80hp friction clutch
Weight (kg)	200	210
Price		

See page 41 for information on Post Hole Digger Augers, which are sold separately.