


Experience professional-grade performance at an affordable price with the BULLY UH Series Rotary Hoes. Ideal for tractors from 50 to 75hp, this gear-driven implement is versatile and reliable, perfect for vineyards, orchards, landscaping, large gardens and light commercial work.

Precision designed in Europe, our forward-action rotary hoe features a smart blade design with six blades in a staggered speed configuration, delivering a powerful yet efficient performance.

Equipped with a reliable friction clutch for gearbox and transmission protection, the UH Series Rotary Hoes confidently handle tough conditions. The chain-supported rear deflector is self-levelling, leaving a smooth finish after each use.

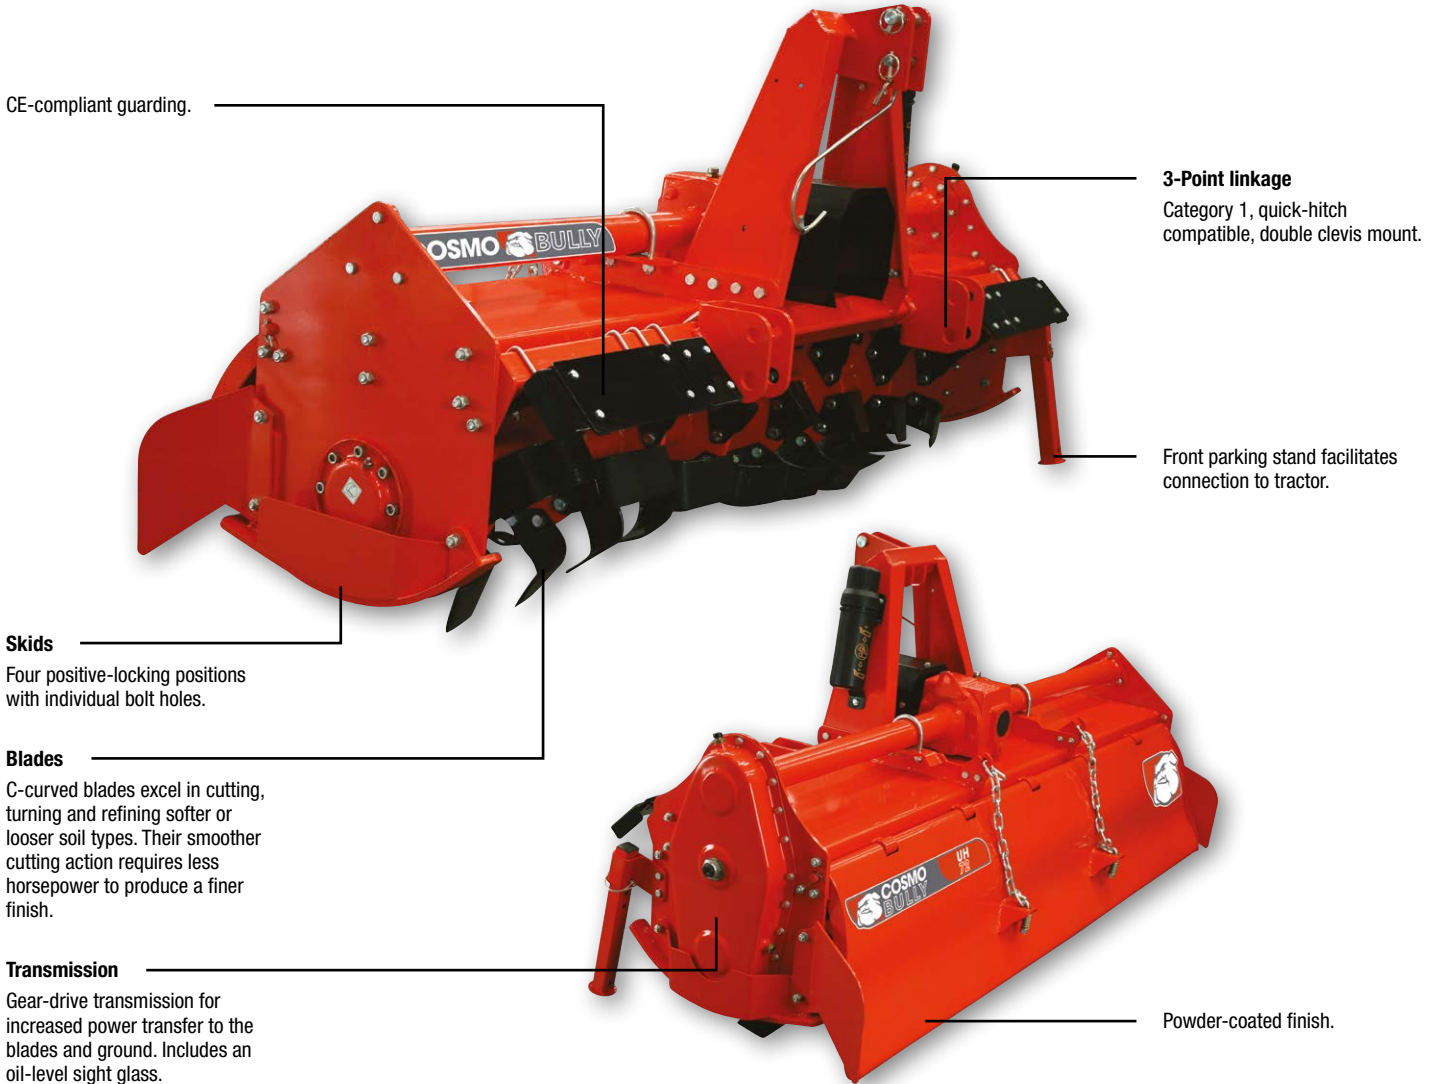

Code	TBUH60	TBUH72	TBUH84
Size reference	1.5m   5'0"   60"	1.8m   6'0"   72"	2.1m   7'0"   84"
Gearbox	75hp, 540rpm, single speed		
PTO shaft/clutch	Series 6 with 200mm (8") friction clutch		
Rotor diameter (mm)	480		
Rotor speed (rpm)	241		
No. of rotor flanges	7	8	9
No. of blades p/flange	6		
Total no. of blades	42	48	54
Overall width (mm)	1834	2063	2292
Working width (mm)	1680	1910	2140
Working depth (mm)	190		
Tractor range (hp)	50 - 75   42 - 63 @ PTO	55 - 75   46 - 63 @ PTO	60 - 75   50 - 63 @ PTO
Weight (kg)	390	420	450