

# Joey Range Rotary Cutter



KANGA JOEY Range Rotary Cutters are the perfect solution for compact and subcompact tractors, ranging from 15 to 40hp. These light-duty cutters are designed to deliver fast and dependable mowing performance on small-holding farms with grassy areas and bracken.

The JOEY's high-speed gearbox produces blade tip speeds superior to equivalent cutters, guaranteeing a high-quality clean cut in a variety of field conditions.

## Guards

Front and rear, bolt-on chain curtain with wire rope replacement system.

## Tower position

Centre-mounted.


## 3-Point linkage

Category 1. Two-plate, double clevis mount designed to absorb lateral load and decrease metal fatigue when turning.



## Skids

Reversible, removable side skids. Four positive-locking individual hole positions in 30mm increments to preset cutting height.

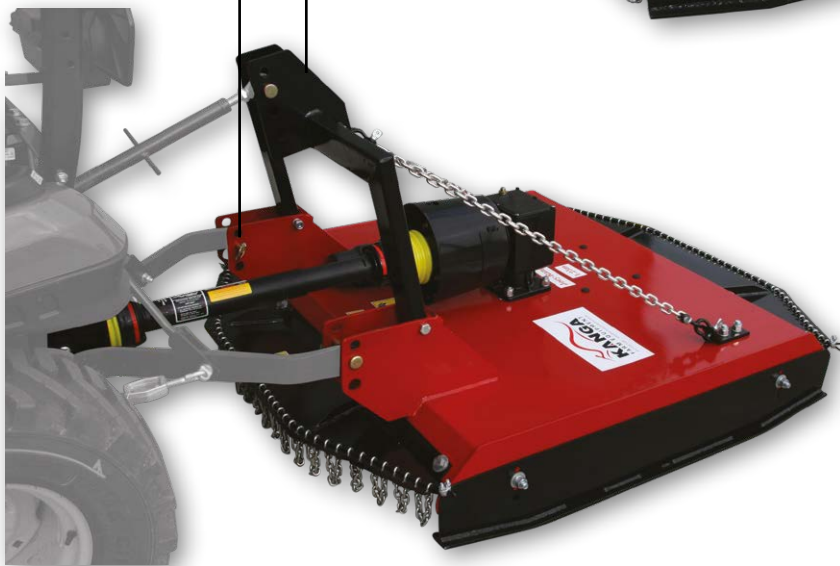

## Options



### KSRDWJ

JOEY Range depth wheel

Code	KSJ100	KSJ125	KSJ150
Size reference	1.0m   3'4"   40"	1.25m   4'1"   49"	1.5m   5'0"   60"
Construction	3mm, square, clean-top deck with reinforced subframe		
Gearbox	50hp, 540rpm, 1:2.83 ratio		40hp, 540rpm, 1:1.93 ratio
PTO shaft/clutch	Series 4 with 150mm (6") friction clutch		
Cutter bar	Lowered, bolt-together, sandwich design		
Blades	Two (2) stepped, suction, spring steel pivoting on hardened bushes		
Overall width (mm)	1050	1300	1600
Cutting width (mm)	940	1190	1440
Cutting height (mm)	30 - 120		
Tractor range (hp)	15 - 30   12.5 - 25 @ PTO	20 - 35   17 - 29 @ PTO	30 - 40   25 - 33 @ PTO
Blade tip speed (ft/min)	15,500	19,000	16,250
Weight (kg)	160	195	240