

# LD Range Grader Blade



KANGA LD Range Grader Blades, engineered for tractors with 15 to 35hp, represent Australia's next generation of grading design, delivering exceptional versatility for various applications, including levelling, finish grading and backfilling.

Equipped with a 5mm tapered main beam to provide the necessary strength to handle a wide range of adjustments, operators can confidently tilt the blade (max. 18°), angle (max. 30°) and offset it (max. 45°) to suit specific requirements. The main pivot points are manual adjustment, ensuring ease of use, while the greaseable feature improves maintenance and long-lasting performance. Relevant adjustment pin holes are reinforced for durability in demanding conditions.


The LD Grader Blades boast a reinforced and involuted mouldboard design, enabling efficient and continuous rolling and clearance of material. Wings assist in containing the material within the blade area, enhancing overall performance.

## Mouldboard

6mm mouldboard can be reversed 180°, enabling efficient back blading by pushing material backwards.

## 3-Point linkage

Category 1, bolt-on lower hitch pins that can be reversed to suit tractors with a narrow linkage connection point.

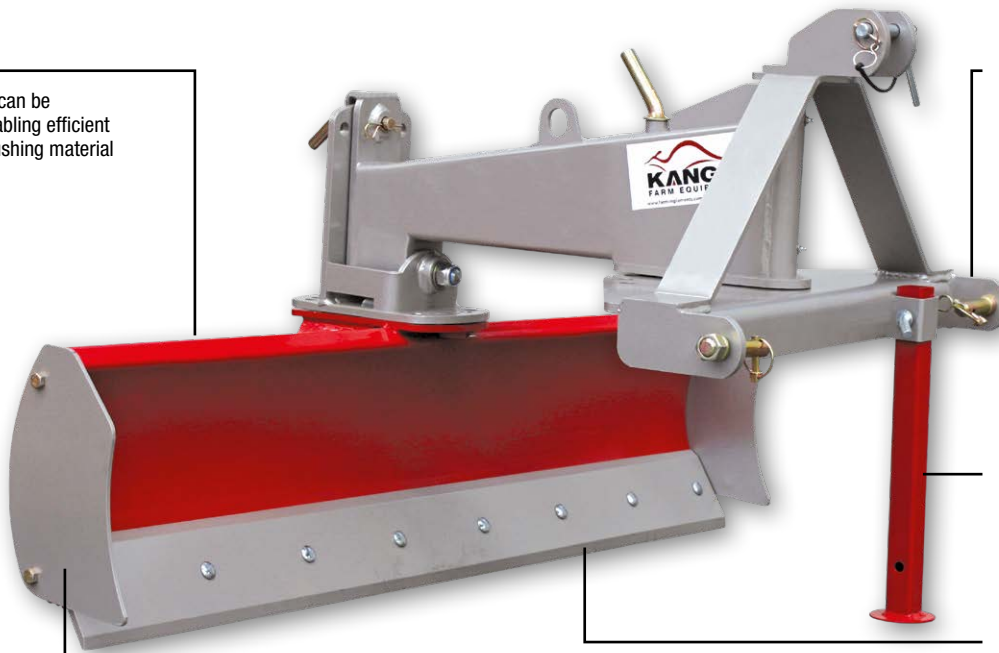

Front parking stand facilitates connection to tractor.


## Reversible grading edge

Manufactured from high alloy BORON steel that is heat-treated, quenched and tempered.


## Finish

High-build primer and agricultural enamel topcoat.


## Options



Angle

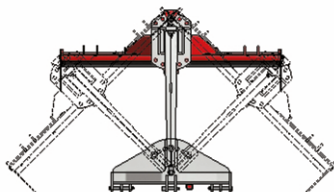

Offset

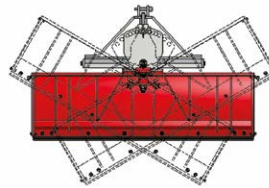

Tilt



**KBDDWK**  
Dual depth wheel kit

Code	KBLD120	KBLD150	KBLD180
Size reference	1.2m   4'0"   48"	1.5m   5'0"   60"	1.8m   6'0"   72"
Adjustment	Angle, offset and tilt		
Controlled by	Pins and clips		
Blade angle	5 positions = square, 2 left, 2 right   15° & 30°		
Blade offset	7 positions = square, 3 left, 3 right   15° (200mm), 30° (400mm) & 45° (600mm)		
Blade tilt	5 positions = square, 2 left, 2 right   9° & 18°		
Overall width (mm)	1250	1550	1850
Tractor range (hp)	15 - 35   12.5 - 29 @ PTO	22 - 35   19 - 29 @ PTO	25 - 35   21 - 29 @ PTO
Weight (kg)	135	145	155