


KANGA XH Range Post Hole Diggers are hydraulic-assist, down-pressure diggers specifically engineered for category 2, 3-point linkage tractors rated from 40 to 100hp.

Equipped with either a 50hp or 75hp gearbox, the XH Range Post Hole Digger allows gradual application of down-pressure to the auger through the hydraulic ram. This feature helps penetrate compacted layers of shale, clay, or other challenging soil types.

The design of this post hole digger ensures that the lower linkage arms of the tractor lock the frame securely in place when in the correct position. Jigging, or raising and lowering of the auger, is conveniently controlled using the 3" hydraulic ram only.

As an added safety measure, shear bolts have been incorporated into the design to protect against potential damage in case the operator forgets to use the hydraulic ram and instead uses the tractor linkage.

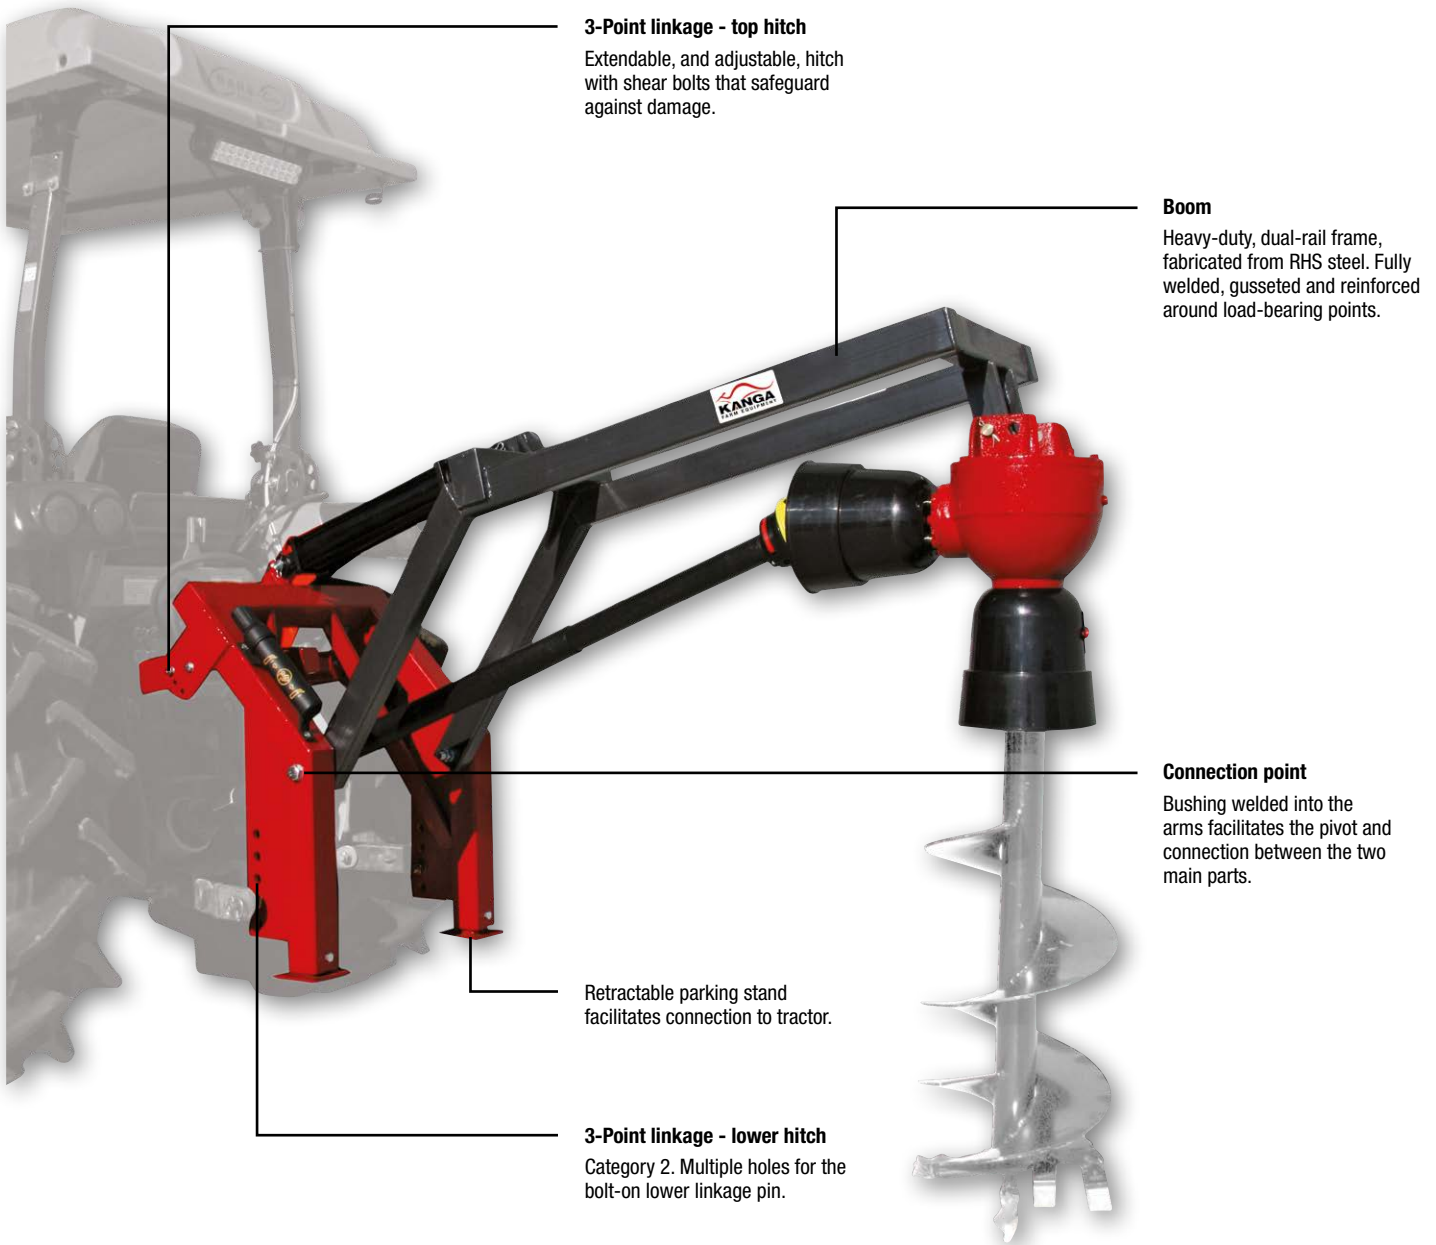

Australian-made and sold separately, the double-cut augers are 1.2m in length and, ground conditions permitting, result in hole depths of up to 1.1m. Refer to our website for more information.

| Code               | KPHD50-XH                                     | KPHD75-XH  |
|--------------------|---|--|
| Gearbox            | 50hp, 540rpm, 3.18:1 reduction ratio          | 75hp, 540rpm, 4.1:1 reduction ratio                      |
| PTO shaft/clutch   | Series 4 with 150mm (6") 40hp friction clutch | Series 4 with heavy-duty 150mm (6") 80hp friction clutch |
| Tractor range (hp) | 40 - 70   33 - 58 @ PTO                       | 50 - 100   42 - 84 @ PTO                                 |
| Weight (kg)        | 200   | 210  |